

FLOS

FA54000333 Anthracite

Kirk 3 NEW


Designed by FLOS Outdoor, 2014



LED source included. LED module configured to work directly on the mains 220-230V ON/OFF. Fixing bracket included. IP68 connector for 6mm$\varnothing$8mm rubber cable. To ensure the tightness of the cable guide it's recommended to use flexible electric cables suitable for exterior use. Ground spike to be ordered separately.

Are you a professional and your project needs consulting and support?

[BOOK AN APPOINTMENT](#)

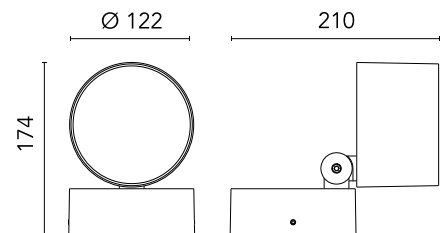

Main specifications

EAN	8054793686356
Mounting	Ground
Environments	Outdoor wet location
Light source type	LED
Light sources included	Yes
LED type	LED array
Number of lamps	1
Power (W)	22
System power (W)	24
Source flux (lm)	2303
Lumen Output (lm)	1610

Physical

Colour	Anthracite
Orientation	Adjustable
Longitudinal tilting (°)	135
Net weight (kg)	1.43
Package height (mm)	175
Package width (mm)	135
Package length (mm)	135
IP internal	65

Download

Mounting instructions [ZIP](#)

Photometric Files

LDT / IES [ZIP](#)

Technical Drawings

2D [ZIP](#)


3D [ZIP](#)

Ecodesign and Energy Labelling



Non-replaceable light source

Schematic light drawing



Photometric

Light distribution	Symmetric
CCT (K)	3000
CRI>	80
Beam angle C0-180 (°)	40
Beam angle C90-270 (°)	40
Extreme cut off	No

Electrical

Insulation class	I
Frequency (Hz)	50/60
Main voltage (Vac)	220-230
Power supply type	Non Dimmable
Emergency	No

Notes

Please check with your referent person in our Front Office if a code modification is needed to meet the required certification compliance

Accessories & Power Supply



OPTIONAL
Accessory

F990E00A000
S.P.D. (SURGE PROTECTION
DEVICE)



OPTIONAL
Accessory

FA268
Ground Spike Kirk 3