

FLOS

■ F002B31AU71.A Anodized Black

Klein Pro H 900 mm Non Dimmable Anodized Black

Designed by FLOS Outdoor, 2017



Power supply not included. Solid surface or ground installation accessories to be ordered separately. Each luminaire is equipped with 1000 mm length outgoing cable and a wiring kit.

Are you a professional and your project needs consulting and support?

BOOK AN APPOINTMENT



Main specifications

EAN	8054793183206
Mounting	Ground
Environments	Outdoor wet location
Light Source Type	LED
Light sources included	Yes
LED type	Power LED
Number of lamps	1
System power (W)	11
System flux (lm)	103

Physical


Color	Anodized Black
Orientation	Fixed
Net weight (lb)	4.76
Package height (in)	4.61
Package width (in)	39.76
Package length (in)	4.53
Package volume (in)	829.32
IP internal	66

Download

Family spec sheet [ZIP](#)
Mounting instructions [ZIP](#)


Photometric Files

LDT / IES [ZIP](#)



Ecodesign and Energy Labelling

This product contains a light source of energy efficiency class E

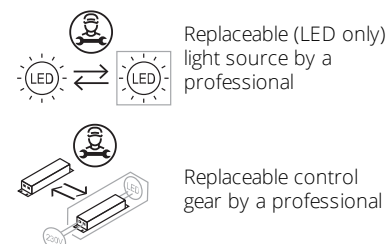

<https://professional.flos.com/en-US/us/product/klein-pro-h-900-mm-non-dimmable-anodized-black-f002b31au71.a/>


F002B31AU71.A

©2022 Flos - P.IVA 00290820174 - 8/31/2025

professional.flos.com | flos.outdoor@flos.com 1/4

In our constantly evolving world and business, technical upgrades happen every day. This means all product specifications and data are subject to change without warning in order to improve reliability, function, performance or otherwise. We make every effort to ensure the accuracy of our product images, however due to different lighting and screens used for viewing, the colours may vary. Images are indicative of the quality and style of the product but may not represent the precise details of the product you receive. This is because we are constantly working to make improvements. For aesthetic reasons, cables and/or electrical elements are often not shown. Refer to technical data sheets for all technical data. Images and colours are not part of any contract or warranty in any way.

Schematic light drawing



Photometric

Light distribution	Asymmetric
CCT (K)	3000
CRI>	80
Beam angle C0-180 (°)	45
Beam angle C90-270 (°)	20
Extreme cut off	No

Electrical

Frequency (Hz)	50/60
Driver	Integrated
Dimmable	No
Dimming interface	Not Dimmable

Notes

Carefully install and maintain the fixtures to avoid damaging the coating. For LED fixtures, most problems are tied to electrical issues related to the insulation, which may cause destructive electrical discharges. These are frequently caused by:

- power surges from the power network where fixture is connected.
- electrostatic discharge (ESD) from the environment.

We recommend installing a power-surge protection device on the fixture to reduce the intensity of these effects and prevent irreversible damages. The specific device should be chosen based on the electrical characteristics.

Accessories & Power Supply



OPTIONAL
Accessory

F002Z050071
Anodized aesthetical pole screen
Anodized Black



OPTIONAL
Accessory

F002Z020000
Klein Pro base plate and fixing
bolts 85x85xH160 mm



OPTIONAL
Accessory

F002Z010001.A
Fixing base for solid surfaces
White



OPTIONAL
Accessory

F002Z010006.A
Fixing base for solid surfaces
Grey




OPTIONAL
Accessory

F002Z010030.A
Fixing base for solid surfaces
Black



OPTIONAL
Accessory

F002Z010012.A
Fixing base for solid surfaces
Forest Green



OPTIONAL
Accessory

F990E00A000
S.P.D. (SURGE PROTECTION
DEVICE)



OPTIONAL
Accessory

F002Z030000.A
Minimal Klein Pro ground fixation
plate, 47x57xH160 mm



OPTIONAL
Accessory

F002Z010018.A

Fixing base for solid surfaces

Deep Brown