

LED power supply source for remote installation, 24V/96W, 120-277V, Variable dim Triac, 0-10V Dimming PWM



LED Driver, 24VDC, 96W, Variable dim Triac, 0-10V Dimming PWM, 120-277VAC Input ,indoor -outdoor enclosure, UL LISTED. Compatible tested dimmers: Lutron DIVA DDTV Lutron DIVA DVST * Lutron Nova-T NTSV-D * Leviton DS710 Leviton Illumatec IP710 * TOP performance

Are you a professional and your project needs consulting and support?


BOOK AN APPOINTMENT

Main specifications

Environments	Outdoor wet location
Power (W)	96

Physical

IP internal	65
-------------	----

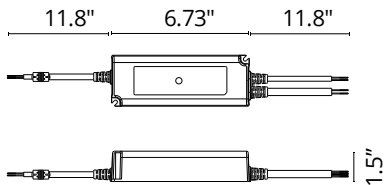

Photometric

Extreme cut off	No
-----------------	----

Electrical

Frequency (Hz)	50-60
Main voltage (Vac)	120-277
Forward voltage (V)	24
Dimmable	Yes
Dimming type	Dimmable 1-10 PWM

Notes

Requires watertight outdoor NEMA rated enclosure(not supplied, by others)
