

FLOS

08.7066.00A90

Light Shadow 4 Lights Adjustable Trim-Trimsless, Airtight Housing for New construction, Integral 0-10V dimmable driver. CCEA Chicago Plenum



Light Shadow 4L adjustable Airtight Housing for New construction, Integral 0-10V dimmable driver. CCEA Chicago Plenum

Are you a professional and your project needs consulting and support?


[BOOK AN APPOINTMENT](#)

Main specifications

Environments	Indoor dry location
Power (W)	10.8

Physical

Length (in)	11.9
Net weight (lb)	10.37

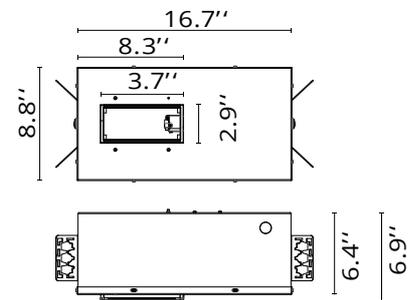

Download

[Mounting instructions](#)

[PDF](#)



Electrical

Frequency (Hz)	50/60
Main voltage (Vac)	120-277
LED current (mA)	900
Driver	Integrated
Dimmable	Yes
Dimming type	Dimmable 0-10V
Dimming range (%)	1-100%