

## Light Shadow Adjustable No Trim 12 Spots Optic Wide Flood - Non IC

Designed by FLOS Architectural, 2022



Recessed integrated luminaire with 12 LED lighting spots. Remote power supply included.

Are you a professional and your project needs consulting and support?


[BOOK AN APPOINTMENT](#)

### Main specifications

Mounting	Ceiling recessed
Environments	Indoor dry location
Light Source Type	LED
Light sources included	Yes
LED type	Power LED
Lamp category	LED
Number of lamps	1
Power (W)	32.4
Source flux (lm)	3240
System flux (lm)	2652

### Physical

Color	White/White
Orientation	Adjustable
Longitudinal tilting (°)	30
IP internal	20

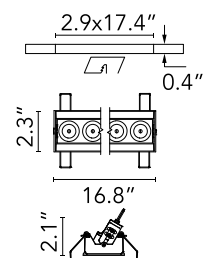

### Download

Family spec sheet	<a href="#">ZIP</a>
Mounting instructions	<a href="#">PDF</a>
Mounting instructions	<a href="#">PDF</a>

### Photometric Files


LDT / IES	<a href="#">ZIP</a>
-----------	---------------------

### Technical Drawings


2D	<a href="#">ZIP</a>
3D	<a href="#">ZIP</a>



## Schematic light drawing



## Ecodesign and Energy Labelling

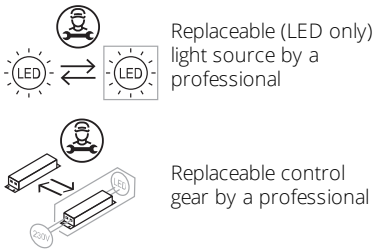

## Photometric

Lighting type	Direct
Light distribution	Symmetric
CCT (K)	2700
CRI>	90
McAdam steps (SDCM)	3
LED Life / Failure Ratio	L80B20 >50.000h (Tc=85°C)
Beam angle C0-180 (°)	45
Beam angle C90-270 (°)	45
UGR <sub>L</sub>	<10


## Electrical

Forward voltage (V)	36
LED current (mA)	900
Driver	Integral - Splice Box
Dimmable	Yes
Dimming type	Dimmable 1-10V
Dimming interface	Remote Dimmable (Dimmer Not Included)

## Notes

It requires a pre-installation frame, to be ordered separately.


Accessories & Power Supply

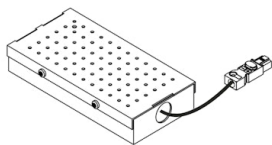

REQUIRED  
Power supply

SP40W900MA-120-A01

Splice Box 7"x3.59"x1.25", 900mA  
, 40W, 0-10V Dimmable, Thermal  
120V

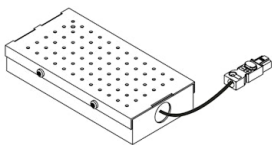

REQUIRED  
Power supply

SP40W900MA-277-A01

Splice Box 7"x3.59"x1.25", 900mA  
, 40W, 0-10V Dimmable, Thermal  
277V




REQUIRED  
Accessory

Installation

08.0518.00.90

Pre-installation No Trim Frame  
12L Fix Adjustable

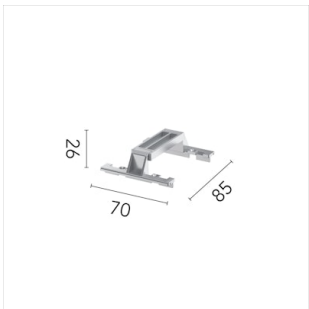

OPTIONAL  
Accessory

Installation

08.0059.90

Accessory for mounting of No  
Trim Adjustable continuous line.