

03.7351.40BDA White/Black

Light Shadow Adjustable No Trim Dali Version 2 Spots Optic Wide Flood

Designed by FLOS Architectural, 2022



Recessed integrated luminaire with 2 LED lighting spots. Remote power supply included (220-240V).

Are you a professional and your project needs consulting and support?


[BOOK AN APPOINTMENT](#)

Main specifications

Mounting	Ceiling recessed
Environments	Indoor dry location
Light source type	LED
Light sources included	Yes
LED type	Power LED
Lamp category	LED
Number of lamps	1
Power (W)	7
Source flux (lm)	540
Lumen Output (lm)	443

Physical

Colour	White/Black
Trim	No
Orientation	Adjustable
Longitudinal tilting (°)	30
Recessed depth (mm)	150
Length (mm)	79
Net weight (kg)	0.25
IP internal	20



Download

Mounting instructions	Download PDF
Mounting instructions	Download PDF

Photometric Files


LDT / IES	Download ZIP
-----------	------------------------------

Technical Drawings

2D	Download ZIP
3D	Download ZIP



Schematic light drawing




Beam Angle: 46°

h(m)	E(lx)	D(m)
1	841	0.84
2	210	1.69
3	93	2.53
4	53	3.38
5	34	4.22

Luminous flux luminaire
443 lm

Ecodesign and Energy Labelling

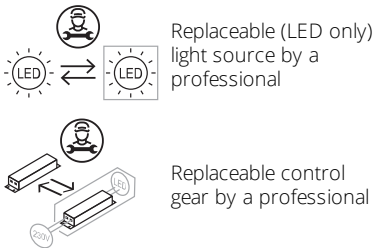

Photometric

Lighting type	Direct
Light distribution	Symmetric
CCT (K)	2700
CRI>	90
McAdam steps (SDCM)	3
LED Life / Failure Ratio	L80B20 >50.000h (Tc=85°C)
Beam angle C0-180 (°)	46
Beam angle C90-270 (°)	46
Extreme cut off	No

Electrical

Insulation class	II
Frequency (Hz)	50/60
Main voltage (Vac)	220-240
Forward voltage (V)	7.2
LED current (mA)	900
Power supply	Remote included
Dimmable	Yes
Power supply type	Dimmable DALI 2
Dimming range (%)	1-100
Dimming interface	Remote Dimmable (Dimmer Not Included)

Notes

It requires a pre-installation frame, to be ordered separately.

Accessories & Power Supply




REQUIRED
Frame

Installation

08.0515.00

Pre-installation No Trim Frame 2L
Adjustable



OPTIONAL
Accessory

Installation

08.0059.90

Accessory for mounting of No
Trim Adjustable continuous line.