

03.7309.40AUQ White/Black

## Light Shadow Adjustable Trim 4 Spots Optic Wide Flood - Non IC

Designed by FLOS Architectural, 2022



Recessed integrated luminaire with 4 LED lighting spots. Remote power supply.

Are you a professional and your project needs consulting and support?


[BOOK AN APPOINTMENT](#)

### Main specifications

Mounting	Ceiling recessed
Environments	Indoor dry location
Light Source Type	LED
Light sources included	Yes
LED type	Power LED
Lamp category	LED
Number of lamps	1
Power (W)	10.8
Source flux (lm)	540
System flux (lm)	735

### Physical

Color	White/Black
Trim	Yes
Orientation	Adjustable
Longitudinal tilting (°)	30
IP internal	20



### Download


Family spec sheet [ZIP](#)  
Mounting instructions [PDF](#)

### Photometric Files


LDT / IES [ZIP](#)



### Ecodesign and Energy Labelling

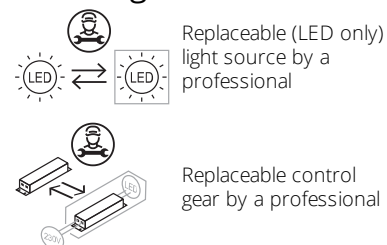

Schematic light drawing



Photometric

Lighting type	Direct
Light distribution	Symmetric
CCT (K)	2700
CRI>	90
LED Life / Failure Ratio	L80B20 >50.000h (Tc=85°C)
Beam angle C0-180 (°)	46
Beam angle C90-270 (°)	46
UGR <sub>L</sub>	<10


Electrical

Forward voltage (V)	12
LED current (mA)	900
Driver	Integral - Splice Box
Dimmable	Yes
Dimming type	Dimmable ELV, Dimmable 0-10V
Dimming interface	Remote Dimmable (Dimmer Not Included)

Notes

Pre-Installation frame not required.


Accessories & Power Supply



REQUIRED  
Power supply

SP20W900MA-ELV-C01


Splice Box 9"x2.22"x1.25",  
900mA , 20W, ELV Dimmable,  
Thermal 120V



REQUIRED  
Power supply

SP25W900MA-120-A01


Splice Box 9"x3.59"x1.25",  
900mA , 25W, 0-10V Dimmable,  
Thermal 120V



REQUIRED  
Power supply

SP25W900MA-277-A01

Splice Box 9"x3.59"x1.25",  
900mA , 25W, 0-10V Dimmable,  
Thermal 277V



OPTIONAL  
Housing and Hanger Bar

TRAY-0036

Registration Tray - non electrical,  
place holder for non IC new  
construction, Light Shadow Fixed  
4 Lights Trimless