

# FLOS

05.9307.14.9S Black/Black/Steel

## Light Shadow Dots Ø30 Push NEW

Designed by FLOS Architectural, 2023




LED - Power LED - 2.7W - 195lm - 2700K - CRI> 90 - Beam° 13

Luminaire with 2x1 functionality: it can work as downlight (recessed, flush with ceiling) or as a projector (fully adjustable). The passage from one position to the other can be made by moving the product easily by hand. Necessary installation pre-frames, not included (to be ordered separately). Requires a power supply unit which is not included, to be ordered separately according to recommendations.

Are you a professional and your project needs consulting and support?

[BOOK AN APPOINTMENT](#)



### Main specifications

|                        |                     |
|------------------------|---------------------|
| Mounting               | Ceiling recessed    |
| Environments           | Indoor dry location |
| Light Source Type      | LED                 |
| Light sources included | Yes                 |
| LED type               | Power LED           |
| Lamp category          | LED                 |
| Number of lamps        | 1                   |
| Power (W)              | 2.7                 |
| System power (W)       | 4.7                 |
| Source flux (lm)       | 257                 |
| System flux (lm)       | 195                 |

### Physical

|                     |                   |
|---------------------|-------------------|
| Color               | Black/Black/Steel |
| Trim                | No                |
| Orientation         | Adjustable        |
| Recessed depth (in) | 4.72              |
| Net weight (lb)     | 0.22              |
| IP internal         | 20                |

### Download


Family spec sheet [ZIP](#)  
Mounting instructions [PDF](#)

### Photometric Files

LDT / IES [ZIP](#)

### Ecodesign and Energy Labelling

This product contains a light source of energy efficiency class **G**

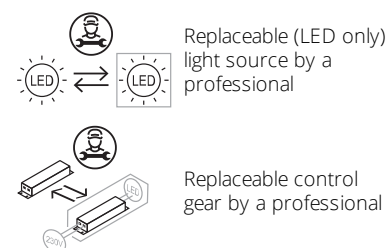

<https://professional.flos.com/en-US/us/product/light-shadow-dots-30-push-05.9307.14.9s/>


05.9307.14.9S

©2022 Flos - P.IVA 00290820174 - 11/14/2025

[professional.flos.com](https://professional.flos.com) | [info@flos.com](mailto:info@flos.com) 1/3

In our constantly evolving world and business, technical upgrades happen every day. This means all product specifications and data are subject to change without warning in order to improve reliability, function, performance or otherwise. We make every effort to ensure the accuracy of our product images, however due to different lighting and screens used for viewing, the colours may vary. Images are indicative of the quality and style of the product but may not represent the precise details of the product you receive. This is because we are constantly working to make improvements. For aesthetic reasons, cables and/or electrical elements are often not shown. Refer to technical data sheets for all technical data. Images and colours are not part of any contract or warranty in any way.

Schematic light drawing



Photometric

|                          |                       |
|--------------------------|-----------------------|
| Lighting type            | Direct                |
| Light distribution       | Symmetric             |
| CCT (K)                  | 2700                  |
| CRI>                     | 90                    |
| McAdam steps (SDCM)      | 3                     |
| Rf fidelity index        | 92                    |
| Rg gamut index           | 100                   |
| LED Life / Failure Ratio | L80B50>60.000h_Tc85°C |
| Beam angle C0-180 (°)    | 13                    |
| Beam angle C90-270 (°)   | 13                    |
| Extreme cut off          | Yes                   |
| UGR <sub>L</sub>         | <10                   |


Electrical

|                     |                                       |
|---------------------|---------------------------------------|
| Forward voltage (V) | 3                                     |
| LED current (mA)    | 900                                   |
| Driver              | Remote                                |
| Dimmable            | Yes                                   |
| Dimming interface   | Remote Dimmable (Dimmer Not Included) |

Accessories & Power Supply



REQUIRED  
08.0756.00.9S  
Installation Frame No Trim for  
Light Shadow Dots Push



REQUIRED  
Power supply  
Electrical  
SP12W900MA-10V-T01  
Splice Box UL 7"x3-5/8"x1-1/4",  
UL With Eldoled Eco Drive 12W  
series Driver Programmed to  
900MA, 12W, 0-10V Dimmable,  
120-277V



OPTIONAL  
Filter  
08.0790.00  
Honeycomb



OPTIONAL  
Filter  
Optical  
08.0791.00  
CCT Increaser Filter D58



OPTIONAL  
Filter  
Optical  
08.0792.00  
CCT Decreaser Filter D12