

FLOS



05.9308.ES.9S Black/Bronze/Bronze

Light Shadow Dots Ø30 Push NEW

Designed by FLOS Architectural, 2023




LED - Power LED - 2.7W - 209lm - 2700K - CRI> 90 - Beam° 12

Luminaire with 2x1 functionality: it can work as downlight (recessed, flush with ceiling) or as a projector (fully adjustable). The passage from one position to the other can be made by moving the product easily by hand. Necessary installation pre-frames, not included (to be ordered separately). Requires a power supply unit which is not included, to be ordered separately according to recommendations.

Are you a professional and your project needs consulting and support?

[BOOK AN APPOINTMENT](#)



Main specifications

Mounting	Ceiling recessed
Environments	Indoor dry location
Light Source Type	LED
Light sources included	Yes
LED type	Power LED
Lamp category	LED
Number of lamps	1
Power (W)	2.7
System power (W)	4.7
Source flux (lm)	257
System flux (lm)	209

Physical

Color	Black/Bronze/Bronze
Trim	No
Orientation	Adjustable
Recessed depth (in)	4.72
Net weight (lb)	0.22
IP internal	20

Download


Family spec sheet	ZIP
Mounting instructions	PDF

Photometric Files

LDT / IES	ZIP
-----------	---------------------

Ecodesign and Energy Labelling

This product contains a light source of energy efficiency class **G**

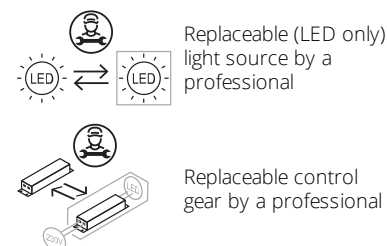

<https://professional.flos.com/en-US/us/product/light-shadow-dots-30-push-05.9308.es.9s/>


05.9308.ES.9S

©2022 Flos - P.IVA 00290820174 - 11/14/2025

professional.flos.com | info@flos.com 1/3

In our constantly evolving world and business, technical upgrades happen every day. This means all product specifications and data are subject to change without warning in order to improve reliability, function, performance or otherwise. We make every effort to ensure the accuracy of our product images, however due to different lighting and screens used for viewing, the colours may vary. Images are indicative of the quality and style of the product but may not represent the precise details of the product you receive. This is because we are constantly working to make improvements. For aesthetic reasons, cables and/or electrical elements are often not shown. Refer to technical data sheets for all technical data. Images and colours are not part of any contract or warranty in any way.

Schematic light drawing



Photometric

Lighting type	Direct
Light distribution	Symmetric
CCT (K)	2700
CRI>	90
McAdam steps (SDCM)	3
Rf fidelity index	92
Rg gamut index	100
LED Life / Failure Ratio	L80B50>60.000h_Tc85°C
Beam angle C0-180 (°)	12
Beam angle C90-270 (°)	12
Extreme cut off	Yes
UGR _L	<10


Electrical

Forward voltage (V)	3
LED current (mA)	900
Driver	Remote
Dimmable	Yes
Dimming interface	Remote Dimmable (Dimmer Not Included)

Accessories & Power Supply



REQUIRED
08.0756.00.9S
Installation Frame No Trim for
Light Shadow Dots Push



REQUIRED
Power supply
Electrical
SP12W900MA-10V-T01
Splice Box UL 7"x3-5/8"x1-1/4",
UL With Eldoled Eco Drive 12W
series Driver Programmed to
900MA, 12W, 0-10V Dimmable,
120-277V



OPTIONAL
Filter
08.0790.00
Honeycomb



OPTIONAL
Filter
Optical
08.0791.00
CCT Increaser Filter D58



OPTIONAL
Filter
Optical
08.0792.00
CCT Decreaser Filter D12