

FLOS

03.8355.14A Black/Black

Light Shadow Fixed No Trim 2 Spots Optic Wide Flood

Designed by FLOS Architectural, 2022



Recessed integrated luminaire with 2 LED lighting spots. Remote power supply included (220-240V).

Are you a professional and your project needs consulting and support?


BOOK AN APPOINTMENT

Main specifications

| | |
|------------------------|---------------------|
| Mounting | Ceiling recessed |
| Environments | Indoor dry location |
| Light source type | LED |
| Light sources included | Yes |
| LED type | Power LED |
| Lamp category | LED |
| Number of lamps | 1 |
| Power (W) | 7 |
| Source flux (lm) | 570 |
| Lumen Output (lm) | 464 |

Physical

| | |
|---------------------|-------------|
| Colour | Black/Black |
| Trim | No |
| Orientation | Fixed |
| Recessed depth (mm) | 150 |
| Length (mm) | 70 |
| Net weight (kg) | 0.25 |
| IP internal | 20 |
| IP external | 55 |



Download

Mounting instructions [Download PDF](#)

Mounting instructions [Download PDF](#)

Photometric Files

LDT / IES [Download ZIP](#)

Technical Drawings


2D [Download ZIP](#)

3D [Download ZIP](#)


Bim [Download ZIP](#)



Schematic light drawing



Ecodesign and Energy Labelling

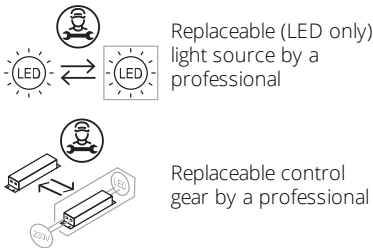

Photometric

| | |
|--------------------------|---------------------------|
| Lighting type | Direct |
| Light distribution | Symmetric |
| CCT (K) | 3000 |
| CRI> | 90 |
| McAdam steps (SDCM) | 3 |
| LED Life / Failure Ratio | L80B20 >50.000h (Tc=85°C) |
| Beam angle C0-180 (°) | 45 |
| Beam angle C90-270 (°) | 45 |
| UGR _L | <10 |

Electrical

| | |
|-----------------------------------|-----------------|
| Insulation class | II |
| Frequency (Hz) | 50/60 |
| Main voltage (Vac) | 220-240 |
| Alternating current voltage (Vac) | 230 |
| Power supply | Remote included |
| Dimmable | No |
| Power supply type | Non Dimmable |

Notes

It requires a pre-installation frame, to be ordered separately.

Accessories & Power Supply




REQUIRED
Frame

Installation

08.0510.00

Pre-installation No Trim Frame 2L
Fix



OPTIONAL
Accessory

Installation

08.0052.90

Accessory for mounting of No
Trim Fix continuous line.