

Light Shadow Fixed No Trim 4 Spots Optic Spot - Non IC

Designed by FLOS Architectural, 2022



Recessed integrated luminaire with 4 LED lighting spots. Remote power supply.

Are you a professional and your project needs consulting and support?


[BOOK AN APPOINTMENT](#)

Main specifications

Mounting	Ceiling recessed
Environments	Indoor dry location
Light Source Type	LED
Light sources included	Yes
LED type	Power LED
Lamp category	LED
Number of lamps	1
Power (W)	10.8
Source flux (lm)	1080
System flux (lm)	724

Physical

Color	Black/Black
Trim	No
Orientation	Fixed
IP internal	20
IP external	55



Download


Family spec sheet [ZIP](#)
Mounting instructions [PDF](#)

Photometric Files


LDT / IES [ZIP](#)



Ecodesign and Energy Labelling

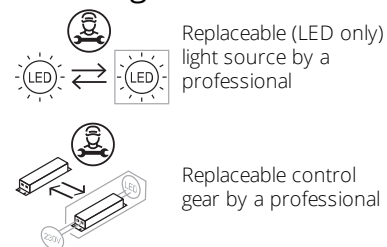

Schematic light drawing



Photometric

Lighting type	Direct
Light distribution	Symmetric
CCT (K)	2700
CRI>	90
McAdam steps (SDCM)	3
LED Life / Failure Ratio	L80B20 >50.000h (Tc=85°C)
Beam angle C0-180 (°)	10
Beam angle C90-270 (°)	10
UGR _L	<10


Electrical

Forward voltage (V)	12
LED current (mA)	900
Driver	Integral - Splice Box
Dimmable	Yes
Dimming type	Dimmable ELV, Dimmable 0-10V
Dimming interface	Remote Dimmable (Dimmer Not Included)

Notes

It requires a pre-installation frame, to be ordered separately.


Accessories & Power Supply



REQUIRED
Accessory


Installation

08.0511.00.90
Pre-installation No Trim Frame 4L
Fix

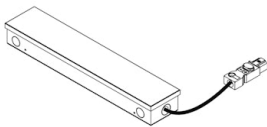


REQUIRED
Power supply

SP20W900MA-ELV-C01
Splice Box 9"x2.22"x1.25",
900mA , 20W, ELV Dimmable,
Thermal 120V




REQUIRED
Power supply

SP25W900MA-120-A01
Splice Box 9"x3.59"x1.25",
900mA , 25W, 0-10V Dimmable,
Thermal 120V



REQUIRED
Power supply

SP25W900MA-277-A01
Splice Box 9"x3.59"x1.25",
900mA , 25W, 0-10V Dimmable,
Thermal 277V



OPTIONAL
Accessory

Installation


08.0052.90
Accessory for mounting of No
Trim Fix continuous line.



OPTIONAL
Accessory

Installation

08.0516.00.90
Pre-installation No Trim Frame 4L
Fix Adjustable



OPTIONAL
Housing and Hanger Bar

TRAY-0038
Registration Tray - non electrical,
place holder for non IC new
construction, for Light Shadow
Adjustable 4 Lights Trim