

# FLOS


05.0642.40.CB White/Bronze

## Light Shadow Fixed No Trim Casambi Version 4 Spots Square Optic Spot NEW

Designed by FLOS Architectural, 2022

841lm - 2700K - CRI> 90 - Beam° 11

Recessed integrated luminaire with 4 LED lighting spots. Remote power supply included (220-240V). It requires a pre-installation frame, to be ordered separately.

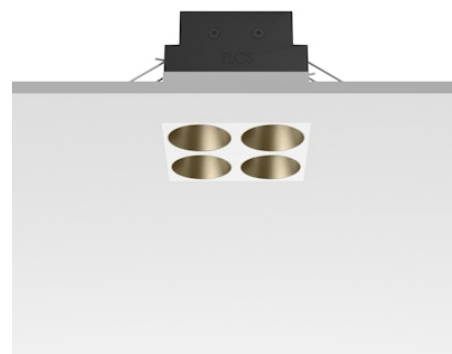

Are you a professional and your project needs consulting and support?


BOOK AN APPOINTMENT

### Main specifications

|                        |                     |
|------------------------|---------------------|
| Mounting               | Ceiling recessed    |
| Environments           | Indoor dry location |
| Light source type      | LED                 |
| Light sources included | Yes                 |
| LED type               | Power LED           |
| Number of lamps        | 1                   |
| System power (W)       | 10.8                |
| Source flux (lm)       | 0                   |
| Lumen Output (lm)      | 841                 |

### Physical

|                 |              |
|-----------------|--------------|
| Colour          | White/Bronze |
| Trim            | No           |
| Orientation     | Fixed        |
| Net weight (kg) | 0.34         |
| IP internal     | 20           |
| IP external     | 55           |



### Download

Mounting instructions [Download PDF](#)

### Photometric Files

LDT / IES [Download ZIP](#)


### Technical Drawings

2D [Download ZIP](#)

3D [Download ZIP](#)



Schematic light drawing



Ecodesign and Energy Labelling



Photometric

|                          |                            |
|--------------------------|----------------------------|
| Lighting type            | Direct                     |
| Light distribution       | Symmetric                  |
| CCT (K)                  | 2700                       |
| CRI>                     | 90                         |
| LED Life / Failure Ratio | L80B10 > 50.000h (Tc=85°C) |
| Beam angle C0-180 (°)    | 11                         |
| Beam angle C90-270 (°)   | 11                         |
| Extreme cut off          | No                         |

Electrical

|                    |                  |
|--------------------|------------------|
| Insulation class   | II               |
| Frequency (Hz)     | 50/60            |
| Main voltage (Vac) | 220-240          |
| LED current (mA)   | 900              |
| Power supply       | Remote included  |
| Dimmable           | Yes              |
| Power supply type  | Dimmable Casambi |

Accessories & Power Supply



REQUIRED  
Frame

08.0269.00  
Pre-installation frame for Light  
Shadow Fixed No Trim 4 Spots  
Square

OPTIONAL  
08.0270.00

Accessory for mounting of No  
Trim continuous line for Light  
Shadow Fixed 4 Spots Square