

FLOS

05.0642.40.NI White/Bronze


Light Shadow Fixed No Trim Mains Dimming Version 4 Spots Square Optic Spot

NEW

Designed by FLOS Architectural, 2022

674lm - 2700K - CRI> 90 - Beam° 11

Recessed integrated luminaire with 4 LED lighting spots. Remote power supply included (220-240V). It requires a pre-installation frame, to be ordered separately.

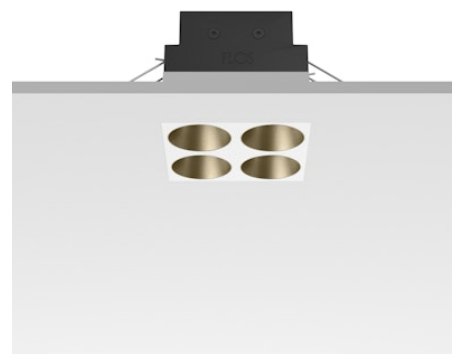

Are you a professional and your project needs consulting and support?


BOOK AN APPOINTMENT

Main specifications

Mounting	Ceiling recessed
Environments	Indoor dry location
Light source type	LED
Light sources included	Yes
LED type	Power LED
Number of lamps	1
System power (W)	10.8
Source flux (lm)	825
Lumen Output (lm)	674
Efficacy (lm/W)	74

Physical

Colour	White/Bronze
Trim	No
Orientation	Fixed
Net weight (kg)	0.34
Package height (mm)	16
Package width (mm)	14
Package length (mm)	21
IP internal	20
IP external	55



Download

Mounting instructions [Download PDF](#)

Photometric Files

LDT / IES [Download ZIP](#)


Technical Drawings

2D [Download ZIP](#)

3D [Download ZIP](#)



Schematic light drawing



Ecodesign and Energy Labelling



Replaceable (LED only)
light source by a
professional

Replaceable control
gear by a professional

Photometric

Lighting type	Direct
Light distribution	Symmetric
CCT (K)	2700
CRI>	90
LED Life / Failure Ratio	L80B10 > 50.000h (Tc=85°C)
Beam angle C0-180 (°)	11
Beam angle C90-270 (°)	11
UGR _L	<10

Electrical

Insulation class	II
Frequency (Hz)	50/60
Main voltage (Vac)	220-240
LED current (mA)	900
Power supply	Remote included
Dimmable	Yes
Power supply type	Mains Cut Dimming

Accessories & Power Supply



REQUIRED
Frame

08.0269.00
Pre-installation frame for Light
Shadow Fixed No Trim 4 Spots
Square

OPTIONAL

08.0270.00
Accessory for mounting of No
Trim continuous line for Light
Shadow Fixed 4 Spots Square