

## Light Shadow Fixed Trim 4 Spots Optic Spot - Airtight IC Rated

Designed by FLOS Architectural, 2022



Recessed integrated luminaire with 4 LED lighting spots. Remote power supply.

Are you a professional and your project needs consulting and support?


[BOOK AN APPOINTMENT](#)

### Main specifications

|                        |                     |
|------------------------|---------------------|
| Mounting               | Ceiling recessed    |
| Environments           | Indoor dry location |
| Light Source Type      | LED                 |
| Light sources included | Yes                 |
| LED type               | Power LED           |
| Lamp category          | LED                 |
| Number of lamps        | 1                   |
| Power (W)              | 10.8                |
| Source flux (lm)       | 1140                |
| System flux (lm)       | 801                 |

### Physical

|                 |             |
|-----------------|-------------|
| Color           | White/White |
| Trim            | Yes         |
| Orientation     | Fixed       |
| Net weight (lb) | 0.75        |
| IP internal     | 20          |
| IP external     | 55          |



### Download


Family spec sheet [ZIP](#)  
Mounting instructions [PDF](#)

### Photometric Files


LDT / IES [ZIP](#)



### Ecodesign and Energy Labelling

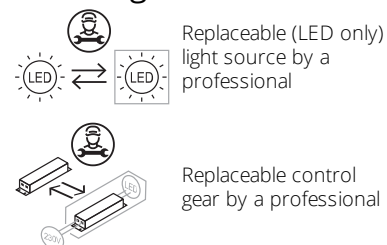

Schematic light drawing



Photometric

|                          |                           |
|--------------------------|---------------------------|
| Lighting type            | Direct                    |
| Light distribution       | Symmetric                 |
| CCT (K)                  | 3000                      |
| CRI>                     | 90                        |
| LED Life / Failure Ratio | L80B20 >50.000h (Tc=85°C) |
| Beam angle C0-180 (°)    | 10                        |
| Beam angle C90-270 (°)   | 10                        |
| Extreme cut off          | No                        |
| UGR <sub>L</sub>         | <10                       |

Electrical

|                     |                                       |
|---------------------|---------------------------------------|
| Forward voltage (V) | 12                                    |
| LED current (mA)    | 900                                   |
| Driver              | Remote                                |
| Dimmable            | Yes                                   |
| Dimming interface   | Remote Dimmable (Dimmer Not Included) |

Notes

Pre-installation frame not required.

Accessories & Power Supply



REQUIRED  
Housing and Hanger Bar

08.1201.00.UJL

Bar Hanger Set , Male-Female (set of 2)



REQUIRED  
Housing and Hanger Bar

08.7065.00A90

Light Shadow 4 Lights Fixed & Wall Washer Trim-Trimsless, Airtight Housing for New construction, Integral 0-10V dimmable driver. CCEA Chicago Plenum