

# FLOS

03.9913.40AUQ White

## Light Shadow Pro Ø 60 Fixed Optic Wide Flood - Non IC NEW


Designed by FLOS Architectural, 2020



LED lighting module, with low glare, to be inserted in the recessed frames (not included), installation through a bayonet system with interchangeable spots. Remote driver not included.

Are you a professional and your project needs consulting and support?

[BOOK AN APPOINTMENT](#)



### Main specifications

|                        |                     |
|------------------------|---------------------|
| Mounting               | Ceiling recessed    |
| Environments           | Indoor dry location |
| Light Source Type      | LED                 |
| Light sources included | Yes                 |
| LED type               | LED array           |
| Lamp category          | LED                 |
| Number of lamps        | 1                   |
| Power (W)              | 12.8                |
| Source flux (lm)       | -9                  |
| System flux (lm)       | 1239                |

### Physical

|                     |        |
|---------------------|--------|
| Color               | White  |
| Orientation         | Fixed  |
| Net weight (lb)     | 0.49   |
| Package height (in) | 6.19   |
| Package width (in)  | 8.27   |
| Package length (in) | 5.32   |
| Package volume (in) | 244.08 |
| IP internal         | 54     |


### Download

Family spec sheet [ZIP](#)  
Mounting instructions [PDF](#)

### Photometric Files

LDT / IES [ZIP](#)

### Ecodesign and Energy Labelling

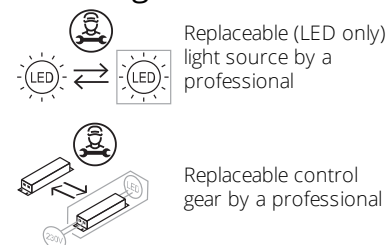

<https://professional.flos.com/en-US/us/product/light-shadow-pro-60-fixed-optic-wide-flood-non-ic-03.9913.40auq/>


03.9913.40AUQ

©2022 Flos - P.IVA 00290820174 - 9/17/2025

[professional.flos.com](https://professional.flos.com) | [info@flos.com](mailto:info@flos.com) 1/3

In our constantly evolving world and business, technical upgrades happen every day. This means all product specifications and data are subject to change without warning in order to improve reliability, function, performance or otherwise. We make every effort to ensure the accuracy of our product images, however due to different lighting and screens used for viewing, the colours may vary. Images are indicative of the quality and style of the product but may not represent the precise details of the product you receive. This is because we are constantly working to make improvements. For aesthetic reasons, cables and/or electrical elements are often not shown. Refer to technical data sheets for all technical data. Images and colours are not part of any contract or warranty in any way.

Schematic light drawing



Photometric

|                          |                             |
|--------------------------|-----------------------------|
| Lighting type            | Direct                      |
| Light distribution       | Symmetric                   |
| CCT (K)                  | 4000                        |
| CRI>                     | 90                          |
| Rf fidelity index        | 92                          |
| Rg gamut index           | 100                         |
| LED Life / Failure Ratio | L80B50>50.000h<br>(Tc=85°C) |
| Beam angle C0-180 (°)    | 51                          |
| Beam angle C90-270 (°)   | 51                          |
| UGR <sub>L</sub>         | <16                         |


Electrical

|                     |                                          |
|---------------------|------------------------------------------|
| Forward voltage (V) | 37.5                                     |
| LED current (mA)    | 350                                      |
| Driver              | Attached Splice Box                      |
| Dimmable            | Yes                                      |
| Dimming interface   | Remote Dimmable<br>(Dimmer Not Included) |

Notes


Please select 250 mA setting in the remote driver to match the power of the Adjustable version.  
Class 2 Listed.

Accessories & Power Supply




REQUIRED  
Power supply  
Electrical

SP30W350MA-120-U01  
Splice Box UL 7"x2.22"x1.25",  
With Driver Programmed to  
350mA , 30W, 0-10V Dimmable,  
Thermal 120V



REQUIRED  
Power supply  
Electrical

SP30W350MA-277-U01  
Splice Box UL 7"x2.22"x1.25",  
With Driver Programmed to  
350mA , 30W, 0-10V Dimmable,  
Thermal 277V



REQUIRED  
Power supply  
Electrical

SP30W350MA-ELV-U01  
Splice Box UL 7"x2.22"x1.25",  
With Driver Programmed to  
350mA , 30W, ELV Phase  
Dimmable, Thermal 120V




REQUIRED  
Frame  
08.0192.00  
Installation Frame No Trim




REQUIRED  
Frame  
08.0160.14  
Installation Frame Trim Ø60



REQUIRED  
Frame  
08.0160.40  
Installation Frame Trim Ø60



OPTIONAL  
Housing and Hanger Bar  
TRAY-0001  
Registration Tray - non electrical,  
place holder for non IC new  
construction, Ø2.95"



OPTIONAL  
Housing and Hanger Bar  
TRAY-0017  
Registration Tray - non electrical,  
place holder for non IC new  
construction, UT57 Trim Ø3.56"