

Light Shadow Surface 4 Spots Optic Spot

Designed by FLOS Architectural




10.8W - 1140lm - 3000K - CRI> 90 - Beam° 10

Surface luminaire with 4 LED lighting spots. Power source 120-227V incorporated.

Are you a professional and your project needs consulting and support?

[BOOK AN APPOINTMENT](#)



Main specifications

Mounting	Ceiling surface
Environments	Indoor dry location
Light Source Type	LED
Light sources included	Yes
LED type	Power LED
Power (W)	10.8
System power (W)	14
System flux (lm)	1140

Physical

Color	White/White/White
Trim	No
Orientation	Fixed
Net weight (lb)	1.33
IP internal	44

Download


Family spec sheet [↓ ZIP](#)
Mounting instructions [↓ PDF](#)

Photometric Files


LDT / IES [↓ ZIP](#)



Ecodesign and Energy Labelling

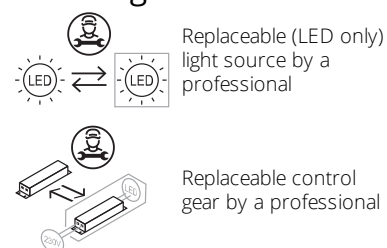

Schematic light drawing



Photometric

Lighting type	Direct
Light distribution	Symmetric
CCT (K)	3000
CRI>	90
LED Life / Failure Ratio	L80B20 >50.000h (Tc=85°C)
Beam angle C0-180 (°)	10
Beam angle C90-270 (°)	10
Extreme cut off	No
UGR _L	<10

Electrical

Frequency (Hz)	50/60
Main voltage (Vac)	120-277
Forward voltage (V)	12
LED current (mA)	900
Driver	Integrated
Dimmable	Yes
Dimming type	Dimmable 0-10V
Dimming interface	Remote Dimmable (Dimmer Not Included)

Accessories & Power Supply



REQUIRED

08.0252.14.19

Surface Spacer



REQUIRED

08.0252.40.19

Surface Spacer