


FLOS



03.8964.14A1V Black/Black/White

Light Shadow Surface 4 Spots Optic Spot

Designed by FLOS Architectural



10.8W - 1080lm - 2700K - CRI> 90 - Beam° 10

Surface luminaire with 4 LED lighting spots. Power source 120-227V incorporated.

Are you a professional and your project needs consulting and support?


BOOK AN APPOINTMENT

Main specifications

Mounting	Ceiling surface
Environments	Indoor dry location
Light Source Type	LED
Light sources included	Yes
LED type	Power LED
Power (W)	10.8
System power (W)	14
System flux (lm)	1080

Physical

Color	Black/Black/White
Trim	No
Orientation	Fixed
Net weight (lb)	1.33
IP internal	44



Download


Family spec sheet [ZIP](#)
Mounting instructions [PDF](#)

Photometric Files

LDT / IES [ZIP](#)



Ecodesign and Energy Labelling

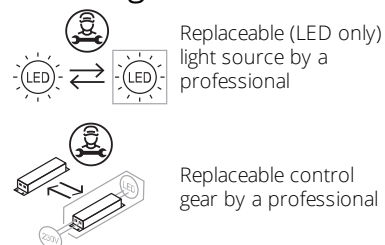

<https://professional.flos.com/en-US/us/product/light-shadow-surface-4-spots-optic-spot-03.8964.14a1v/>


03.8964.14A1V

©2022 Flos - P.IVA 00290820174 - 11/13/2025

professional.flos.com | info@flos.com 1/3

In our constantly evolving world and business, technical upgrades happen every day. This means all product specifications and data are subject to change without warning in order to improve reliability, function, performance or otherwise. We make every effort to ensure the accuracy of our product images, however due to different lighting and screens used for viewing, the colours may vary. Images are indicative of the quality and style of the product but may not represent the precise details of the product you receive. This is because we are constantly working to make improvements. For aesthetic reasons, cables and/or electrical elements are often not shown. Refer to technical data sheets for all technical data. Images and colours are not part of any contract or warranty in any way.

Schematic light drawing



Photometric

Lighting type	Direct
Light distribution	Symmetric
CCT (K)	2700
CRI>	90
LED Life / Failure Ratio	L80B20 >50.000h (Tc=85°C)
Beam angle C0-180 (°)	10
Beam angle C90-270 (°)	10
Extreme cut off	No
UGR _L	<10

Electrical

Frequency (Hz)	50/60
Main voltage (Vac)	120-277
Forward voltage (V)	12
LED current (mA)	900
Driver	Integrated
Dimmable	Yes
Dimming type	Dimmable 0-10V
Dimming interface	Remote Dimmable (Dimmer Not Included)

Accessories & Power Supply



REQUIRED

08.0252.14.19

Surface Spacer



REQUIRED

08.0252.40.19

Surface Spacer