


FLOS

05.2142.14ADA Black/Black/Copper

Light Shadow Surface Dali Version 4 Spots Optic Spot NEW

Designed by FLOS Architectural




LED - Power LED - 10.8W - 789lm - 2700K - CRI> 90 - Beam° 12

Surface luminaire with 4 LED lighting spots. Power source 220-240V incorporated.

Are you a professional and your project needs consulting and support?

BOOK AN APPOINTMENT



Main specifications

Mounting	Ceiling surface
Environments	Indoor dry location
Light source type	LED
Light sources included	Yes
LED type	Power LED
Lamp category	LED
Number of lamps	1
Power (W)	10.8
Source flux (lm)	1080
Lumen Output (lm)	789

Physical

Colour	Black/Black/Copper
Orientation	Fixed
Length (mm)	146
Net weight (kg)	0.8
Package height (mm)	6
Package width (mm)	13
Package length (mm)	21
IP internal	44

Download

Mounting instructions




Photometric Files


LDT / IES



Ecodesign and Energy Labelling

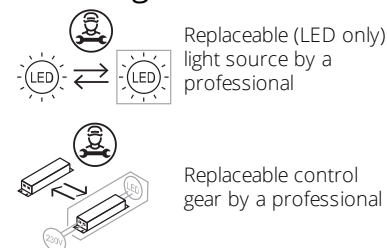

Schematic light drawing



Photometric

Lighting type	Direct
Light distribution	Symmetric
CCT (K)	2700
CRI>	90
LED Life / Failure Ratio	L80B50 > 50.000h (Tc=85°C)
Beam angle C0-180 (°)	12
Beam angle C90-270 (°)	12
UGR _L	<10

Electrical

Insulation class	I
Frequency (Hz)	50/60
Main voltage (Vac)	220-240
Alternating current voltage (Vac)	230
Forward voltage (V)	12
Power supply	Integrated
Dimmable	Yes
Power supply type	Dimmable DALI 1