

# FLOS

03.8110.14A Black

## Light Tube Ø 30 Indirect 900 mm On Board Dimmer


Designed by Vincent Van Duysen



Diffused LED light module to be installed in The Infra-Structure.

Are you a professional and your project needs consulting and support?

BOOK AN APPOINTMENT



### Main specifications

Mounting	Track
Environments	Indoor dry location
Light Source Type	LED
Light sources included	Yes
LED type	Top LED
Number of lamps	1
Power (W)	23

### Physical

Color	Black
Orientation	Fixed
Length (in)	37.16
IP internal	20

### Download

Family spec sheet [ZIP](#)

Mounting instructions [PDF](#)

### Photometric Files


LDT / IES [ZIP](#)

### Technical Drawings

2D [ZIP](#)

3D [ZIP](#)

### Schematic light drawing



Beam Angle: 93°

h(m)	E(lx)	D(m)
1	541	2.10
2	135	4.20
3	60	6.30
4	34	8.40
5	22	10.51

Luminous flux luminaire  
1260 lm

## Photometric


Lighting type	Indirect
Light distribution	Symmetric
CCT (K)	2700
CRI>	90
Beam angle C0-180 (°)	93
Beam angle C90-270 (°)	99
UGR <sub>L</sub>	<10

## Electrical

Insulation class	III
Forward voltage (V)	48
Driver	Remote
Dimmable	Yes
Dimming type	Dimmer on board
Dimming interface	Dimmer Integrated

## Ecodesign and Energy

### Labelling

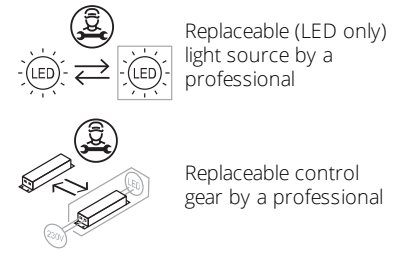

## Notes

System turning fastening elements 0°-90° with a magnetic connection and mechanic security lock for a transversally installation between two lines of the profile. The Light Tube are only fed by one of the ends and do not communicate current through the other end. For wireless lighting control, choose integrated Casambi versions.