

06.2607.14 Black

## Linear Connector Feed Dimmable NEW

Designed by FLOS Architectural, 2023



Ceiling surface, Wall surface

Feed intermediate connector. Rear feeding cable entry.

Are you a professional and your project needs consulting and support?


BOOK AN APPOINTMENT

### Main specifications

|                        |                               |
|------------------------|-------------------------------|
| Mounting               | Ceiling surface, Wall surface |
| Environments           | Indoor dry location           |
| Light sources included | No                            |

### Physical

|                 |       |
|-----------------|-------|
| Colour          | Black |
| Net weight (kg) | 0.02  |
| IP internal     | 20    |

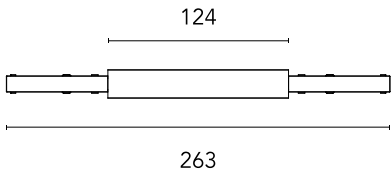

### Download

Mounting instructions

PDF



### Electrical


|                     |                                       |
|---------------------|---------------------------------------|
| Insulation class    | III                                   |
| Forward voltage (V) | 24                                    |
| Power supply        | Remote excluded                       |
| Dimmable            | Yes                                   |
| Power supply type   | Dimmable                              |
| Dimming interface   | Remote Dimmable (Dimmer Not Included) |

Accessories & Power Supply



REQUIRED  
Power supply  
Electrical

60.9352  
LED power supply source for remote installation in 24V/200W electric control panel. To avoid problems of overload it is recommended to install a power source every 185W. 100/240V.




REQUIRED  
Power supply  
Electrical

60.9705  
Remote Power Supply Non Dimmable 24V. 60W. 220/240V



REQUIRED  
Power supply  
Electrical

60.9777A  
Remote Power Supply Non Dimmable 24V. 120W. 220/240V



OPTIONAL  
Power supply  
Electrical

08.0613.14A  
Dimmable control box 1-10V, 24/48V. For remote installation.