

FLOS


FU374400 Glass

Luce Orizzontale S2

Designed by Ronan & Erwan Bouroullec, 2022

145W - 6682lm - 2700K - CRI> 95

Suspended lamp consisting of interconnected glass modules that reach a length of 1.66 mt. (S1) 2.07 mt. (S2) 2.49 mt. (S3) with 2.70 m suspended power cable. The cylindrical transparent glass modules are created through an artisanal process by pouring the glass into a rotating mold to obtain an exclusive finish that makes each single piece unique. Internal structure in polished extruded aluminum equipped with two linear LED modules for direct and indirect lighting downwards. The modules can be easily removed and replaced in case of maintenance. The power supply unit and the Dali Dimmer are located within the ceiling rose while a touch control button, positioned on one end of the product, allows the luminaire to be controlled in three different modes. Control options available: TOUCH_ Features direct control via the touch button on the lamp. This option allows to dim and adjust the light intensity of both the up and down emission (individually or combined) from 10% to 100%. PUSH&TOUCH_ Features remote on/off control via Push button as well as dim and adjustability of the light intensity of both the up and down emission (individually or combined) from 10% to 100% through the touch button integrated on the lamp. DALI&TOUCH_ Features remote on/off control via DALI DT6 as well as dim and adjustability of the light intensity of both the up and down emission (individually or combined) from 10% to 100% through the touch button integrated on the lamp.

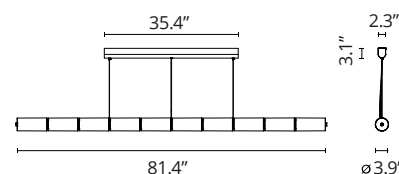

Download

Mounting instructions




Ecodesign and Energy Labelling

This product contains a light source of energy efficiency class F



Replaceable (LED only) light source by a professional



Replaceable control gear by a professional

Are you a professional and your project needs consulting and support?

BOOK AN APPOINTMENT

Main specifications

Mounting	Suspension
Environments	Indoor dry location
Light Source Type	LED
Light sources included	Yes
LED type	LED Module
Power (W)	145
System flux (lm)	6682

Physical

Color	Glass
Length (in)	81.57
Cord color	Clear
Cord length (in)	106.299
Canopy color	White
Canopy lenght/diameter (in)	35.433
Canopy width (in)	61
Canopy height (in)	3.071
Net weight (lb)	76.06
Package volume (in)	13349.61
IP internal	20



Photometric

Lighting type	Indirect, Direct
Light distribution	Symmetric
CCT (K)	2700
CRI>	95
Extreme cut off	No

Electrical

Insulation class	I
Frequency (Hz)	50/60
Main voltage (Vac)	100-240
LED current (mA)	600
Driver	Integrated
Dimmable	Yes
Dimming type	Dimmer on board
Dimming interface	Dimmer Integrated

Spare Parts



01.	Led Board for Luce Orizzontale Suspension 2	RF3747300
02.	Suspensión Ring Wiring 4m for Luce Orizzontale	RF3746200
03.	Closed Glass Difusser for Luce Orizzontale	RF3746300
04.	Open Glass Difusser for Luce Orizzontale	RF3746400
05.	Linear Difusser Luce Orizzontale Suspension 2	RF3747200
06.	Assembly Driver for Luce Orizzontale	RF32976
08.	Rose for Luce Orizzontale Suspension 1-Suspension 2 White	RF3746600



RF3747300

Led Board for Luce Orizzontale
Suspension 2



RF3746200

Suspensión Ring Wiring 4m for
Luce Orizzontale



RF3746300

Closed Glass Difusser for Luce
Orizzontale



RF3746400

Open Glass Difusser for Luce
Orizzontale



RF3747200

Linear Difusser Luce Orizzontale
Suspension 2



RF32976

Assembly Driver for Luce
Orizzontale



RF3746600

Rose for Luce Orizzontale
Suspension 1-Suspension 2
White