

My Circuit Sphere

Designed by Michael Anastassiades, 2023



40W - 2268lm - 2700K - CRI> 90 - Beam° 310

Suspended luminaire for installation in the My Circuit system. Diffused omnidirectional emission. Adjustable suspension height. Casambi version for wireless control.

Are you a professional and your project needs consulting and support?

[BOOK AN APPOINTMENT](#)

Main specifications

Mounting	Track
Environments	Indoor dry location
Light Source Type	LED
Light sources included	Yes
LED type	Top LED
Number of lamps	1
Power (W)	40
Source flux (lm)	3600
System flux (lm)	2268
Efficacy (lm/W)	57

Physical

Color	White
Orientation	Fixed
Cord color	White
Net weight (lb)	0.44
IP internal	20

Download

- Family spec sheet [↓ ZIP](#)
- Mounting instructions [↓ PDF](#)


Photometric Files

- LDT / IES [↓ ZIP](#)


Technical Drawings

- 2D [↓ ZIP](#)
- 3D [↓ ZIP](#)

Ecodesign and Energy Labelling

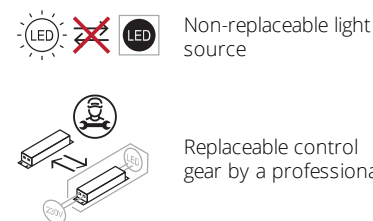

Schematic light drawing




Photometric

Lighting type	Direct
Light distribution	Symmetric
CCT (K)	2700
CRI>	90
McAdam steps (SDCM)	3
Rf fidelity index	91
Rg gamut index	92
LED Life / Failure Ratio	L70B50 > 63.000h (Tc=85°C)
Beam angle C0-180 (°)	310
Beam angle C90-270 (°)	310
Extreme cut off	No
UGR _L	<19

Electrical

Insulation class	III
Forward voltage (V)	48
Driver	Remote excluded
Dimmable	Yes
Dimming type	Dimmable Casambi
Dimming interface	Remote Dimmable (Dimmer Not Included)

Accessories & Power Supply



OPTIONAL
Control interface

Electrical

08.0824.14

Dimming Interface 1-10V to
CASAMBI