


FLOS

 F0267000 Black

Noctambule Floor 3 High Cylinder Cone Big Base

Designed by Konstantin Grcic, 2019


54W - 1459lm - 2700K - CRI> 90



Standing lamps consisting of interconnecting glass modules reaching a height of 2,17 metres (85.43"). Cylindrical and semi-spherical transparent blown glass structure, die cast aluminium base and rings, hydroformed steel internal lateral arms and injection moulded optical opal silicone outer ring diffusers. The power supply cable is 2 metres (78.74") long, with a pedal operated panel used as a dimmer to adjust the light intensity by 10% to 100% in either direction. Wall mounted power supply unit with interchangeable plugs.

Are you a professional and your project needs consulting and support?

[BOOK AN APPOINTMENT](#)



Main specifications

EAN	8059607000601
Mounting	Floor
Environments	Indoor dry location
Light source type	LED
Light sources included	Yes
LED type	LED Module
Power (W)	54
Lumen Output (lm)	1459

Physical

Colour	Black
Length (mm)	365
Cord colour	Black
Cord length (mm)	1800
Net weight (kg)	26.5
Package volume (m3)	0.38
IP internal	20

Download


Mounting instructions	Download PDF
Mounting instructions	Download PDF

Photometric Files

LDT / IES	Download ZIP
-----------	------------------------------

Technical Drawings

3D	Download ZIP
 Bim	Download ZIP

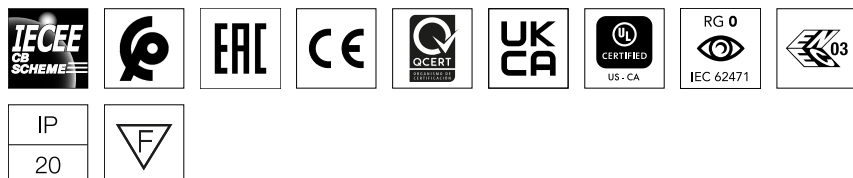

<https://professional.flos.com/en/global/product/noctambule-floor-3-high-cylinder-cone-big-base-f0267000/>


F0267000

©2022 Flos - P.IVA 00290820174 - 9/4/2025

professional.flos.com | info@flos.com 1/4

In our constantly evolving world and business, technical upgrades happen every day. This means all product specifications and data are subject to change without warning in order to improve reliability, function, performance or otherwise. We make every effort to ensure the accuracy of our product images, however due to different lighting and screens used for viewing, the colours may vary. Images are indicative of the quality and style of the product but may not represent the precise details of the product you receive. This is because we are constantly working to make improvements. For aesthetic reasons, cables and/or electrical elements are often not shown. Refer to technical data sheets for all technical data. Images and colours are not part of any contract or warranty in any way.

Schematic light drawing



Photometric




Lighting type	Total
Light distribution	Symmetric
CCT (K)	2700
CRI>	90
Extreme cut off	No

Electrical




Insulation class	III
Frequency (Hz)	50/60
Main voltage (Vac)	100-240
Power supply	Remote included
Dimmable	Yes
Power supply type	Electronic 48V
Dimming interface	Dimmer Integrated
Plug type	Type G, Type A, Type C
Batteries inside	No

Ecodesign and Energy Labelling

This product contains a light source of energy efficiency class E




Replaceable (LED only) light source by a professional



Replaceable control gear by an end-user

Spare Parts

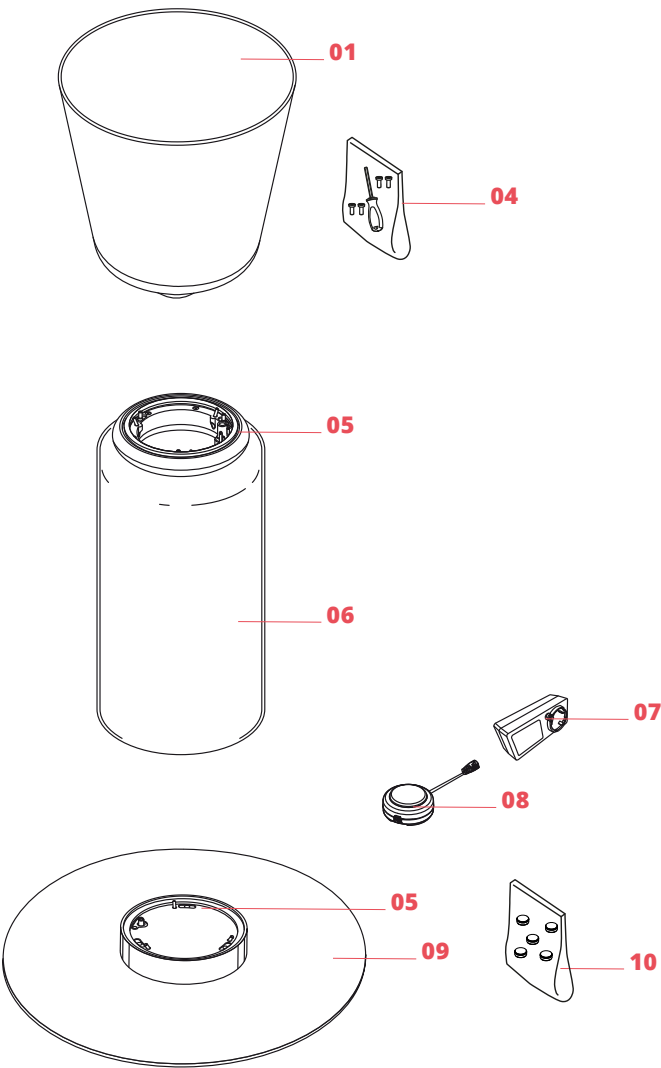

01.	Noctambule Cone	F0260000
04.	Fixing screws kit	RF0254100
05.	Ring led diffuser	RF27498
06.	Noctambule High Cylinder	F0257000
07.	Black plug assembly kit & 48V driver	RF6600130
08.	Noctambule switch dimmer assembly (with EMC filter)	RF37082
09.	Noctambule Floor big base	F0262030
10.	Noctambule F n°5 adjustable feet kit	RF0254200



F0260000

Noctambule Cone



RF0254100

Fixing screws kit



RF27498

Ring led diffuser




F0257000

Noctambule High Cylinder



RF6600130

Black plug assembly kit & 48V driver

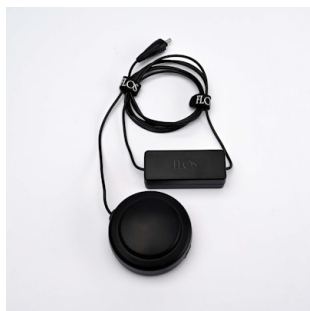

RF37082

Noctambule switch dimmer assembly (with EMC filter)



F0262030

Noctambule Floor big base



RF0254200

Noctambule F n°5 adjustable feet kit