

FLOS

 F0290000 Black

Noctambule Floor 3 Low Cylinder Small Base

Designed by Konstantin Grcic, 2019


36W - 1057lm - 2700K



Standing lamps consisting of interconnecting glass modules reaching a height of 2,17 metres (85.43"). Cylindrical and semi-spherical transparent blown glass structure, die cast aluminium base and rings, hydroformed steel internal lateral arms and injection moulded optical opal silicone outer ring diffusers. The power supply cable is 2 metres (78.74") long, with a pedal operated panel used as a dimmer to adjust the light intensity by 10% to 100% in either direction. Wall mounted power supply unit with interchangeable plugs.

Are you a professional and your project needs consulting and support?

[BOOK AN APPOINTMENT](#)



Main specifications

EAN	8059607000885
Mounting	Floor
Environments	Indoor dry location
Light source type	LED
Light sources included	Yes
LED type	LED Module
Power (W)	36
Lumen Output (lm)	1057

Physical

Colour	Black
Length (mm)	250
Cord colour	Black
Cord length (mm)	1800
Net weight (kg)	17.3
Package volume (m3)	0.24
IP internal	20

Download

[Mounting instructions](#)  PDF

[Mounting instructions](#)  PDF


Photometric Files

[LDT / IES](#)  ZIP

Technical Drawings

[3D](#)  ZIP

[Bim](#)  ZIP

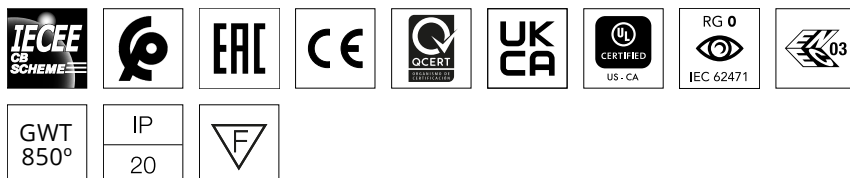

<https://professional.flos.com/en/global/product/noctambule-floor-3-low-cylinder-small-base-f0290000/>


F0290000

©2022 Flos - P.IVA 00290820174 - 9/4/2025

professional.flos.com | info@flos.com 1/4

In our constantly evolving world and business, technical upgrades happen every day. This means all product specifications and data are subject to change without warning in order to improve reliability, function, performance or otherwise. We make every effort to ensure the accuracy of our product images, however due to different lighting and screens used for viewing, the colours may vary. Images are indicative of the quality and style of the product but may not represent the precise details of the product you receive. This is because we are constantly working to make improvements. For aesthetic reasons, cables and/or electrical elements are often not shown. Refer to technical data sheets for all technical data. Images and colours are not part of any contract or warranty in any way.

Schematic light drawing



Photometric


Lighting type	Total
Light distribution	Symmetric
CCT (K)	2700
Extreme cut off	No

Electrical

Insulation class	III
Frequency (Hz)	50/60
Main voltage (Vac)	100-240
Power supply	Remote included
Dimmable	Yes
Power supply type	Electronic 48V
Dimming interface	Dimmer Integrated
Plug type	Type G, Type A, Type C
Batteries inside	No

Ecodesign and Energy Labelling


This product contains a light source of energy efficiency class E



Replaceable (LED only)
light source by a
professional

Replaceable control
gear by an end-user

Spare Parts

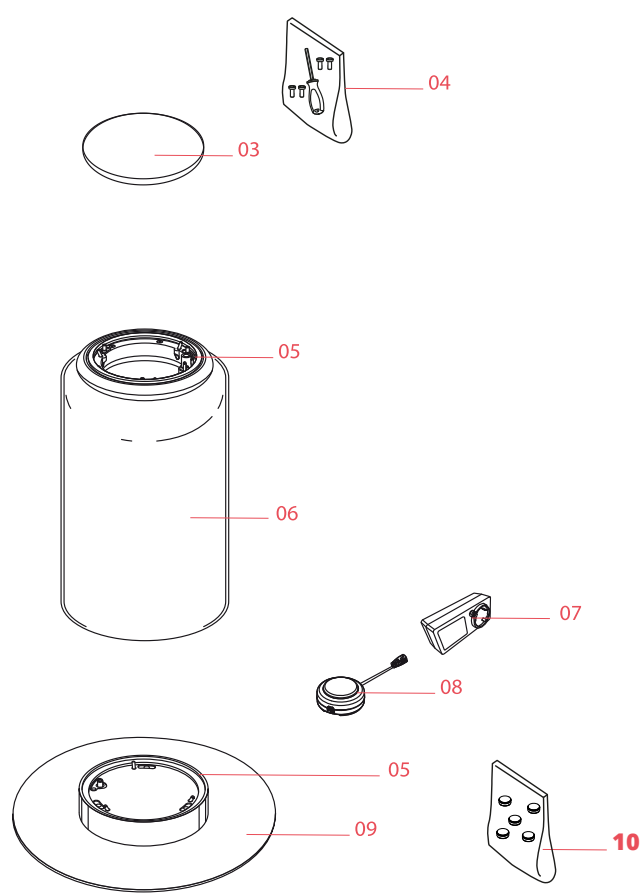

03.	Noctambule Floor Terminal cap	F0293030
04.	Fixing screws kit	RF0254100
05.	Ring led diffuser	RF27498
06.	Noctambule Low Cylinder	F0254000
07.	Black plug assembly kit & 48V driver	RF6600130
08.	Noctambule switch dimmer assembly (with EMC filter)	RF37082
09.	Noctambule Floor Small base	F0261030
10.	Noctambule F n°5 adjustable feet kit	RF0254200



F0293030

Noctambule Floor Terminal cap



RF0254100

Fixing screws kit



RF27498

Ring led diffuser




F0254000

Noctambule Low Cylinder



RF6600130

Black plug assembly kit & 48V driver



RF37082

Noctambule switch dimmer assembly (with EMC filter)



F0261030

Noctambule Floor Small base



RF0254200

Noctambule F n°5 adjustable feet kit