


# FLOS

FA52512418 Deep Brown

## Perseo 4 RGB NEW


Designed by FLOS Outdoor, 2012

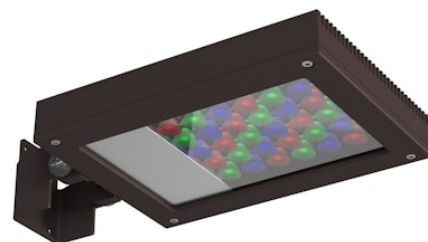

LED source included. Integrated power supply 220-240V. Graduated fixing bracket included. Equipped with a M20x1.5 cable guide (for 7mm< $\phi$ <13mm cables) and IP68 connector. To ensure the tightness of the cable guide it's recommended to use flexible electric cables suitable for exterior use. Optional accessories: protruding arm for walls; feet and arms to install the luminaire on a mast; wall-washer visor and anti-vandalism protection lid. Extraclear transparent glass.

Are you a professional and your project needs consulting and support?

[BOOK AN APPOINTMENT](#)



### Main specifications

|                        |                      |
|------------------------|----------------------|
| EAN                    | 8054793645773        |
| Mounting               | Wall, Ground         |
| Environments           | Outdoor wet location |
| Light source type      | LED                  |
| Light sources included | Yes                  |
| LED type               | Power LED            |
| Number of lamps        | 1                    |
| System power (W)       | 40                   |

### Physical

|                          |            |
|--------------------------|------------|
| Colour                   | Deep Brown |
| Orientation              | Adjustable |
| Longitudinal tilting (°) | 156        |
| Net weight (kg)          | 5.06       |
| Package height (mm)      | 155        |
| Package width (mm)       | 265        |
| Package length (mm)      | 430        |
| Package volume (m3)      | 0.02       |
| IP internal              | 65         |

### Download


Mounting instructions

[ZIP](#)

### Ecodesign and Energy Labelling



Replaceable (LED only) light source by a professional



Replaceable control gear by a professional

Photometric

|                        |           |
|------------------------|-----------|
| Light distribution     | Symmetric |
| CCT (K)                | RGB       |
| Beam angle C0-180 (°)  | 40        |
| Beam angle C90-270 (°) | 40        |
| Extreme cut off        | No        |


Electrical

|                    |                   |
|--------------------|-------------------|
| Insulation class   | I                 |
| Frequency (Hz)     | 50/60             |
| Main voltage (Vac) | 220-240           |
| Power supply       | Integrated        |
| Dimmable           | Yes               |
| Power supply type  | Dimmable DMX      |
| Dimming interface  | Dimmer Integrated |
| Emergency          | No                |

Notes

Please check with your referent person in our Front Office if a code modification is needed to meet the required certification compliance

Accessories & Power Supply



OPTIONAL  
Accessory

F990E00A000  
S.P.D. (SURGE PROTECTION  
DEVICE)



OPTIONAL  
Accessory

F990B10A000  
DMX controller; dimmer switch  
for recessed box (60mm hole  
centres)



OPTIONAL  
Accessory

F990B11A000  
DMX controller; stand-alone/pc  
interface.



OPTIONAL  
Accessory

F990B13A000  
DMX splitter 512



OPTIONAL  
Accessory

F990B12A000  
DMX cable - shielded twisted pair  
with 110 Ohm constant  
impedance



OPTIONAL  
Pole

FA24806  
Pole Ø76 mm h 3500 mm(with  
Base)



OPTIONAL  
Pole

FA24833  
Pole Ø76 mm h 3500 mm(with  
Base)



OPTIONAL  
Pole

FA25006  
Pole Ø76 mm h 3500 mm (+500  
mm In-ground)



OPTIONAL Pole

FA25033

Pole Ø76 mm h 3500 mm (+500 mm In-ground)



OPTIONAL Pole

FA24906

Pole Ø76 mm h 4500 mm(with Base)



OPTIONAL Pole

FA24933

Pole Ø76 mm h 4500 mm(with Base)



OPTIONAL Pole

FA25106

Pole Ø76 mm h 4500 mm (+500 mm In-ground)



OPTIONAL Pole

FA25133

Pole Ø76 mm h 4500 mm (+500 mm In-ground)



OPTIONAL Pole

FA414006

Pole Ø 102 mm h 4000 mm With Base



OPTIONAL Pole

FA414033

Pole Ø 102 mm h 4000 mm With Base



OPTIONAL Pole

FA414506

Pole Ø 102 mm h 4000 mm (+500 mm In-ground)



OPTIONAL  
Pole

FA414533

Pole Ø 102 mm h 4000 mm  
(+500 mm In-ground)



OPTIONAL  
Pole

FA415006

Pole Ø 102 mm h 5000 mm With  
Base



OPTIONAL  
Pole

FA415033

Pole Ø 102 mm h 5000 mm With  
Base



OPTIONAL  
Pole

FA415506

Pole Ø 102 mm h 5000 mm  
(+500 mm In-ground)



OPTIONAL  
Accessory

FA116

Base Plate and Fixing Bolts for  
Pole Ø 102 mm h 4000/5000  
mm with Base



OPTIONAL  
Accessory

FA16730

Wall Washer Visor Perseo 4



OPTIONAL  
Accessory

FA18118

Wall Bracket Perseo 4 1000 mm



OPTIONAL  
Accessory

FA16830

Antivandal Louvre Perseo 4



OPTIONAL  
Bracket

FA9033

Pole Bracket Franco 2/Perseo 4 Ø  
102 mm 180 mm Double



OPTIONAL  
Bracket

FA9006

Pole Bracket Franco 2/Perseo 4 Ø  
102 mm 180 mm Double



OPTIONAL  
Bracket

FA9533

Pole Bracket Franco 2/Perseo 4 Ø  
60 mm 180 mm Double



OPTIONAL  
Bracket

FA9506

Pole Bracket Franco 2/Perseo 4 Ø  
60 mm 180 mm Double



OPTIONAL  
Bracket

FA11433

Pole Bracket Franco 2/Perseo 4 Ø  
76 mm 180 mm Double



OPTIONAL  
Bracket

FA11406

Pole Bracket Franco 2/Perseo 4 Ø  
76 mm 180 mm Double



OPTIONAL  
Bracket

FA8933

Pole Bracket Franco 2/Perseo 4 Ø  
102 mm 500 mm Double



OPTIONAL  
Bracket

FA8906

Pole Bracket Franco 2/Perseo 4 Ø  
102 mm 500 mm Double



OPTIONAL  
Bracket

FA9633

Pole Bracket Franco 2/Perseo 4 Ø  
60 mm 500 mm Double



OPTIONAL  
Bracket

FA9606

Pole Bracket Franco 2/Perseo 4 Ø  
60 mm 500 mm Double



OPTIONAL  
Bracket

FA11533

Pole Bracket Franco 2/Perseo 4 Ø  
76 mm 500 mm Double



OPTIONAL  
Bracket

FA11506

Pole Bracket Franco 2/Perseo 4 Ø  
76 mm 500 mm Double



OPTIONAL  
Bracket

FA9333

Pole Bracket Franco 2/Perseo 4 Ø  
60 mm 180 mm



OPTIONAL  
Bracket

FA9306

Pole Bracket Franco 2/Perseo 4 Ø  
60 mm 180 mm



OPTIONAL  
Bracket

FA9433

Pole Bracket Franco 2/Perseo 4 Ø  
60 mm 500 mm



OPTIONAL  
Bracket

FA9406

Pole Bracket Franco 2/Perseo 4 Ø  
60 mm 500 mm



OPTIONAL  
Bracket

FA11233

Pole Bracket Franco 2/Perseo 4 Ø  
76 mm 180 mm Single



OPTIONAL  
Bracket

FA11206

Pole Bracket Franco 2/Perseo 4 Ø  
76 mm 180 mm Single



OPTIONAL  
Bracket

FA11333

Pole Bracket Franco 2/Perseo 4 Ø  
76 mm 500 mm Single



OPTIONAL  
Bracket

FA11306

Pole Bracket Franco 2/Perseo 4 Ø  
76 mm 500 mm Single



OPTIONAL  
Bracket

FA7833

Pole Bracket Franco 2/Perseo 4 Ø  
102 mm 180 mm Single



OPTIONAL  
Bracket

FA7806

Pole Bracket Franco 2/Perseo 4 Ø  
102 mm 180 mm Single



OPTIONAL  
Bracket

FA7933

Pole Bracket Franco 2/Perseo 4 Ø  
102 mm 500 mm Single



OPTIONAL  
Bracket

FA7906

Pole Bracket Franco 2/Perseo 4 Ø  
102 mm 500 mm Single