

# FLOS

F023C2DD006 Grey

## Pointbreak Balisage 2 - 105 Dimmable DALI

Designed by Piero Lissoni, 2020




600lm - 2700K - CRI> 80

LED light source included. Integrated 220-240V ON/OFF and 1-10V/DALI dimmable electrical power. Equipped with one piece of neoprene output cable. IP68 junction system to be ordered separately. Luminaire must be installed with mandatory box for installation, ordered separately.

Are you a professional and your project needs consulting and support?

BOOK AN APPOINTMENT

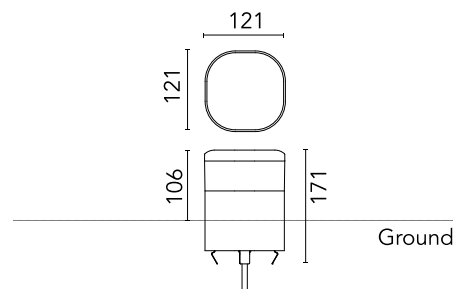

### Main specifications

|                        |                      |
|------------------------|----------------------|
| EAN                    | 8054793369891        |
| Mounting               | Ground               |
| Environments           | Outdoor wet location |
| Light source type      | LED                  |
| Light sources included | Yes                  |
| LED type               | Power LED            |
| Number of lamps        | 1                    |
| System power (W)       | 12.5                 |
| Source flux (lm)       | 1374                 |
| Lumen Output (lm)      | 600                  |

### Physical

|                     |       |
|---------------------|-------|
| Colour              | Grey  |
| Orientation         | Fixed |
| Recessed depth (mm) | 65    |
| Length (mm)         | 121   |
| Net weight (kg)     | 2.33  |
| Package height (mm) | 165   |
| Package width (mm)  | 270   |
| Package length (mm) | 230   |
| Package volume (m3) | 0.01  |
| IP internal         | 65    |
| H2O stop            | Yes   |

### Download

Mounting instructions [ZIP](#)

### Photometric Files

LDT / IES [ZIP](#)

### Technical Drawings

2D [ZIP](#)

3D [ZIP](#)

[Bim](#) [ZIP](#)



Schematic light drawing



Photometric

|                    |            |
|--------------------|------------|
| Light distribution | Asymmetric |
| CCT (K)            | 2700       |
| CRI>               | 80         |
| Extreme cut off    | No         |

Electrical

|                    |                   |
|--------------------|-------------------|
| Insulation class   | I                 |
| Frequency (Hz)     | 50/60             |
| Main voltage (Vac) | 220-240           |
| Power supply       | Integrated        |
| Dimmable           | Yes               |
| Power supply type  | Dimmable DALI 1   |
| Dimming interface  | Dimmer Integrated |
| Emergency          | No                |

Ecodesign and Energy Labelling

This product contains a light source of energy efficiency class E

Replaceable (LED only) light source by a professional

Replaceable control gear by a professional

Accessories & Power Supply



REQUIRED  
Accessory

F023Z040000

Box for ground installation