

# FLOS


06.2600.ES Brushed Bronze

## Profile 1000mm Dimmable NEW

Designed by FLOS Architectural, 2023

Ceiling surface, Wall surface

Interior electromechanical profile (24Vdc) from 1 to 3m long for wall or ceiling installation, fastened with special screws and plugs provided with the profile. Request power connectors, intermediate connectors and covers separately. Feed unit joints available in the form of L, T and X in the same plane. It also has a linear electric connector for joining two track sections in the same plane and a 90° electromechanical connector for joining profile sections in different planes (interior wall-wall, ceiling-wall). Aesthetic covers for the inner profile gap available as an option.

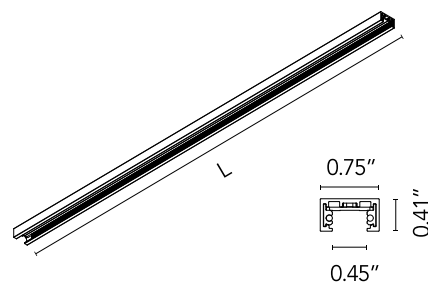

Are you a professional and your project needs consulting and support?

[BOOK AN APPOINTMENT](#)

### Main specifications

|                        |                               |
|------------------------|-------------------------------|
| Mounting               | Ceiling surface, Wall surface |
| Environments           | Indoor dry location           |
| Light sources included | No                            |

### Physical

|             |                |
|-------------|----------------|
| Color       | Brushed Bronze |
| IP internal | 20             |

### Download

|                                       |                     |
|---------------------------------------|---------------------|
| <a href="#">Family spec sheet</a>     | <a href="#">ZIP</a> |
| <a href="#">Mounting instructions</a> | <a href="#">PDF</a> |



Photometric

Extreme cut off                      No

Electrical

|                     |                                             |
|---------------------|---------------------------------------------|
| Insulation class    | III                                         |
| Forward voltage (V) | 24                                          |
| Driver              | Remote excluded                             |
| Dimmable            | Yes                                         |
| Dimming type        | Dimmable                                    |
| Dimming interface   | Remote Dimmable<br>(Dimmer Not<br>Included) |

Accessories & Power Supply



REQUIRED  
Connector

06.2606.ES

Live End Feed Dimmable



REQUIRED  
Connector

06.2607.ES

Linear Connector Feed Dimmable



REQUIRED  
Component

06.2617.ES

Blind End



REQUIRED  
Corner

06.2609.ES

90° Corner Feed Dimmable



REQUIRED  
Power supply

06.2622.ES


Power Supply Surface End  
Dimmable / Non Dimmable



REQUIRED  
Power supply

06.2623.ES

Power Supply Surface Middle  
Dimmable / Non Dimmable




OPTIONAL  
Power supply

Electrical

08.0613.14A

Dimmable control box 1-10V,  
24/48V. For remote installation.




OPTIONAL  
Component

Installation

06.2618.40A

Track Cover 3000mm



OPTIONAL  
Component

Installation

06.2618.14A

Track Cover 3000mm



OPTIONAL  
Connector

Electrical

06.2608.14

Straight Connector



OPTIONAL  
Connector

Electrical

06.2608.40

Straight Connector