

Profile 2000mm Non Dimmable

NEW

Designed by FLOS Architectural, 2023

Ceiling surface, Wall surface

Interior electromechanical profile (24Vdc) from 1 to 3m long for wall or ceiling installation, fastened with special screws and plugs provided with the profile. Request power connectors, intermediate connectors and covers separately. Feed unit joints available in the form of L, T and X in the same plane. It also has a linear electric connector for joining two track sections in the same plane and a 90° electromechanical connector for joining profile sections in different planes (interior wall-wall, ceiling-wall). Aesthetic covers for the inner profile gap available as an option.

Are you a professional and your project needs consulting and support?


BOOK AN APPOINTMENT

Main specifications

Mounting	Ceiling surface, Wall surface
Environments	Indoor dry location
Light sources included	No

Physical

Color	White
IP internal	20

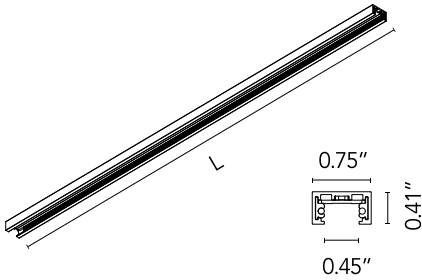

Download

- Family spec sheet
- ZIP
- Mounting instructions
- PDF

EAC

CE

UKCA

UL
CERTIFIED
US - CA

FIRE SAFETY

IP
20

Electrical

Insulation class	III
Forward voltage (V)	24
Driver	Remote excluded
Dimmable	No
Dimming type	Non Dimmable

Accessories & Power Supply



REQUIRED
Connector

Electrical

06.2613.40

Live End Feed Non Dimmable



REQUIRED
Corner

06.2610.40

Inner Corner



REQUIRED
Corner

Electrical

06.2614.40

90° Corner Feed Non Dimmable



REQUIRED
Component

Installation

06.2617.40

Blind End



REQUIRED
Connector

Electrical

06.2621.40

Linear Connector Feed - Non Dimmable



REQUIRED
Power supply

06.2622.40


Power Supply Surface End Dimmable / Non Dimmable



REQUIRED
Power supply

06.2623.40

Power Supply Surface Middle Dimmable / Non Dimmable




OPTIONAL
Power supply

Electrical

08.0613.14A

Dimmable control box 1-10V, 24/48V. For remote installation.



OPTIONAL
Component

Installation

06.2618.40A

Track Cover 3000mm



OPTIONAL
Connector

Electrical

06.2608.40

Straight Connector