

# FLOS

06.6034.14 Black

## Recessed/Surface Feed Connector NEW

Designed by FLOS Architectural, 2020



2m cable included. Electrical connection. Luminaires cannot be located in the connector.

Are you a professional and your project needs consulting and support?


[BOOK AN APPOINTMENT](#)

### Main specifications

Mounting	Track
Environments	Indoor dry location
Power (W)	MAX 120

### Physical

Colour	Black
Net weight (kg)	0.06

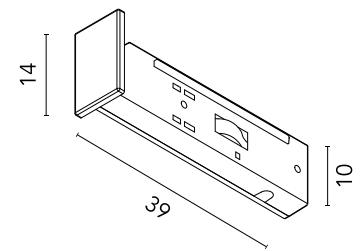

### Download

- [Mounting instructions](#)  PDF
- [Mounting instructions](#)  PDF



### Electrical

Insulation class	III
Forward voltage (V)	24
LED voltage Vf (Vdc)	24
Dimmable	Yes
Dimming interface	Remote Dimmable (Dimmer Not Included)

## Notes

PWM voltage output dimmable drivers shall be used at frequencies between 250 and 500Hz.

---

## Accessories & Power Supply



OPTIONAL  
Power supply

Electrical

60.9681

Remote power supply. Dimmable through 0-1/10V.protocol. 24V. Dimming range 10-100%



OPTIONAL  
Power supply

Electrical

60.9682

Remote power supply. Dimmable through DALI protocol. 24V. Dimming range 10-100%



OPTIONAL  
Power supply

Electrical

60.9683

Remote power supply. Dimmable through Casambi protocol. 24V. Dimming range 10-100%



OPTIONAL  
Control interface

Electrical

60.9392

Casambi controller. Use only with 60.9361. Requires 1-10V or Dali driver. It must be ordered separately



OPTIONAL  
Power supply

Electrical

60.9359

24V Remote power supply. 25W 110/240V



OPTIONAL  
Power supply

Electrical

60.9360

24V Remote power supply. 36W-110V / 45W-240V



OPTIONAL  
Power supply

Electrical

60.9361

24V Remote power supply. 57W 220/240V