

Reinforced Profile 2000mm Dimmable

NEW

Designed by FLOS Architectural, 2024




Recessed

Interior electromechanical recessed profile (24Vdc) from 1 to 3m long for wall or ceiling installation, with screw and plug fixation supplied with the profile. Request power connectors, intermediate connectors, and covers separately. Unit joints available in L, T, and X shapes in the same plane. Also includes a linear electric connector for joining two track sections in the same plane and a 90° electromechanical connector for joining profile sections in different planes (interior wall-wall, ceiling-wall).

Are you a professional and your project needs consulting and support?

BOOK AN APPOINTMENT

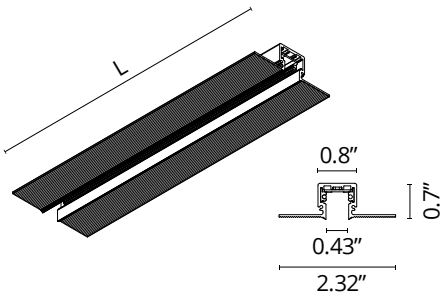

Main specifications

Mounting	Recessed
Environments	Indoor dry location
Light sources included	No

Physical

Color	Black
Trim	No
Field cuttable	Yes
IP internal	20

Download

Family spec sheet

ZIP

Mounting instructions

PDF




Photometric

Extreme cut off No

Electrical

Insulation class	III
Forward voltage (V)	24
Driver	Remote
Dimmable	Yes
Dimming type	Dimmable DALI 2, Dimmable 1-10V
Dimming interface	Remote Dimmable (Dimmer Not Included)
Batteries inside	No

Accessories & Power Supply



REQUIRED
Power supply

Electrical

08.0613.14A
Dimmable control box 1-10V,
24/48V. For remote installation.



REQUIRED
Connector

Electrical

06.0456.14
Live End Feed



REQUIRED
Component

Mounting

06.0461.14
Blind End



REQUIRED
Corner

Electrical

06.0459.14.90
T Connector



REQUIRED
Corner

Electrical

06.0460.14.90
X Connector



OPTIONAL
Connector

Electrical

06.2608.14
Straight Connector



OPTIONAL
Corner

Electrical

06.0457.14
90° Corner



OPTIONAL
Corner

Electrical

06.0458.14
Inner Corner