


Remote Power Supply Kit. Non Dimmable/Dali Version

NEW

Designed by FLOS Architectural

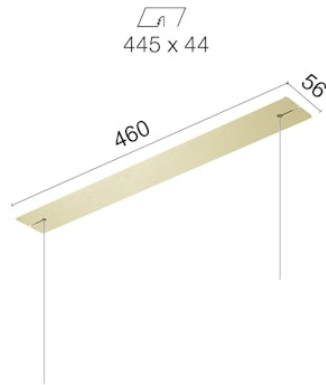

Includes two suspension kits and two 45W - 220/240V power supplies. Kits for Super Line Pro Up&Down are equipped with two outputs to select which part (Up or Down) is brighter.

Are you a professional and your project needs consulting and support?

BOOK AN APPOINTMENT

Download

Mounting instructions




Main specifications

Mounting	Ceiling recessed
Power (W)	80

Physical

Colour	Brushed Brass
Recessed depth (mm)	90
Net weight (kg)	0.75
IP internal	20
IP external	20

Ecodesign and Energy Labelling



Replaceable control gear by a professional



Photometric

Extreme cut off No

Electrical

Insulation class	II
Frequency (Hz)	50/60
LED current (mA)	600/1000
Power supply type	Non Dimmable, Dimmable DALI 2
Dimming interface	Remote Dimmable (Dimmer Not Included)