

FLOS

 F6582015 Copper

Serena

Designed by Patricia Urquiola, 2015


15W - 643lm - 2700K - CRI> 90



Adjustable table lamp providing indirect and reflected light. Extruded aluminium heatsink, photoengraved black PC cut-off, photoengraved optical PMMA diffuser. Reflector in sheared and folded pre-anodized aluminium. Power cord length 200 cm, with dimmer switch that provides ON-OFF functions and 10-100% light adjustment. Plug-in power supply with interchangeable plugs

Are you a professional and your project needs consulting and support?

[BOOK AN APPOINTMENT](#)



Main specifications

| | |
|-------------------|---------------------|
| EAN | 8059607006603 |
| Mounting | Table |
| Environments | Indoor dry location |
| Light Source Type | LED |
| LED type | LED Module |
| Power (W) | 15 |
| System flux (lm) | 643 |

Physical

| | |
|---------------------|--------|
| Colour | Copper |
| Net weight (kg) | 1.2 |
| Package volume (m3) | 0.02 |
| IP internal | 20 |

Download

| | |
|---------------------------------------|-----------------------|
| Mounting instructions | ↓ PDF |
| Mounting instructions | ↓ PDF |
| Spare Parts | ↓ PDF |

Photometric Files


| | |
|---------------------------|-----------------------|
| LDT / IES | ↓ LDT |
|---------------------------|-----------------------|

Technical Drawings

| | |
|--------------------|-----------------------|
| 2D | ↓ ZIP |
| 3D | ↓ ZIP |



Schematic light drawing



Luminous flux luminaire
643 lm

Photometric

| | |
|--------------------|------------|
| Lighting type | Indirect |
| Light distribution | Asymmetric |
| CCT (K) | 2700 |
| CRI> | 90 |

Electrical


| | |
|----------------------|------------------------|
| Insulation class | III |
| Frequency (Hz) | 50/60 |
| Main voltage (Vac) | 100-240/24 |
| LED voltage Vf (Vdc) | null |
| Driver | Remote included |
| Dimmable | Yes |
| Dimming type | Electronic 24V |
| Dimming interface | Dimmer Integrated |
| Plug type | Type G, Type A, Type C |
| Batteries inside | No |
| Charging min time | No |

Ecodesign and Energy Labelling

This product contains a light source of energy efficiency class F




Replaceable (LED only)
light source by a
professional



Replaceable control
gear by an end-user

Spare Parts

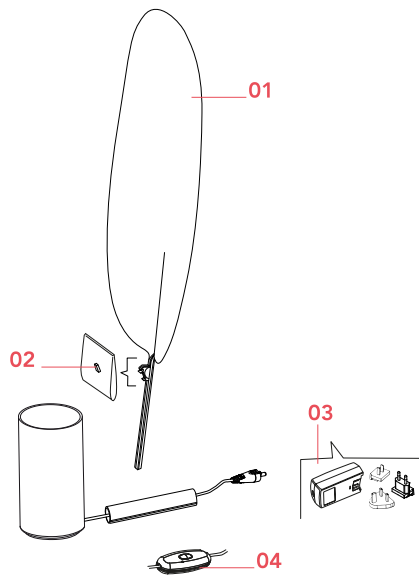

- | | | |
|-----|---|-----------|
| 01. | Cooper leaf reflector | F6581015 |
| 03. | Black plug assembly kit & 24V driver | RF3320100 |
| 04. | Jack plug with coaxial cable and dimmer | RF6605100 |

DOWNLOAD



F6581015
Cooper leaf reflector



RF3320100
Black plug assembly kit & 24V
driver



RF6605100
Jack plug with coaxial cable and
dimmer