

## Smithfield Ceiling Pro dimmable DALI

Designed by Jasper Morrison, 2009




45W - 2791lm - 2700K - CRI> 95

Ceiling-mounted lamp providing direct light. Aluminium body. Available in gloss black, white, matt black, green, red or MUD. Injection-moulded opalescent methacrylate diffuser. Steel wall and ceiling attachment. Control DALI dimmable.

Are you a professional and your project needs consulting and support?

[BOOK AN APPOINTMENT](#)

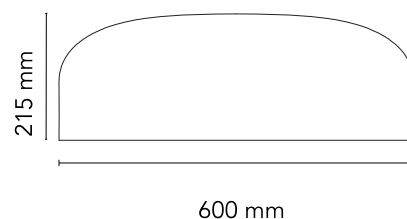

### Main specifications

|                        |                     |
|------------------------|---------------------|
| EAN                    | 8059607015100       |
| Mounting               | Ceiling             |
| Environments           | Indoor dry location |
| Light source type      | LED                 |
| Light sources included | Yes                 |
| LED type               | LED Module          |
| Power (W)              | 45                  |
| System power (W)       | 45                  |
| Lumen Output (lm)      | 2791                |

### Physical

|                     |       |
|---------------------|-------|
| Colour              | Green |
| Length (mm)         | 600   |
| Net weight (kg)     | 5.8   |
| Package height (mm) | 310   |
| Package width (mm)  | 710   |
| Package length (mm) | 710   |
| Package volume (m3) | 0.16  |
| IP internal         | 20    |

### Download

Mounting instructions [↓ PDF](#)

### Photometric Files


LDT / IES [↓ LDT](#)

### Technical Drawings


2D [↓ ZIP](#)

3D [↓ ZIP](#)

 Bim [↓ ZIP](#)

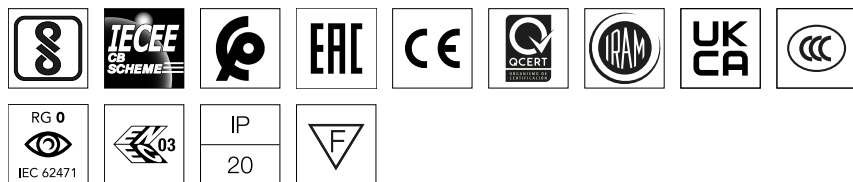

Schematic light drawing



Photometric


|                    |                |
|--------------------|----------------|
| Light distribution | Roto symmetric |
| CCT (K)            | 2700           |
| CRI>               | 95             |
| Extreme cut off    | No             |

Electrical


|                    |                                       |
|--------------------|---------------------------------------|
| Insulation class   | I                                     |
| Frequency (Hz)     | 50/60                                 |
| Main voltage (Vac) | 200-240                               |
| Power supply       | Integrated                            |
| Dimmable           | Yes                                   |
| Power supply type  | Dimmable DALI 1                       |
| Dimming interface  | Remote Dimmable (Dimmer Not Included) |
| Batteries inside   | No                                    |

Ecodesign and Energy Labelling

This product contains a light source of energy efficiency class F




Replaceable (LED only) light source by a professional



Replaceable control gear by a professional

Spare Parts

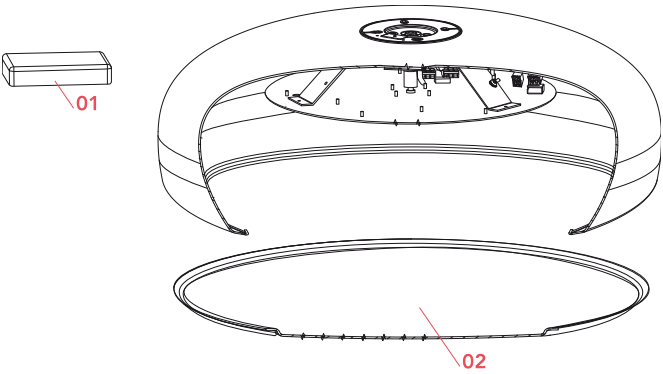

- |     |                                             |         |
|-----|---------------------------------------------|---------|
| 01. | Smithfield Ceiling Driver 45W<br>450-1050mA | RF31980 |
| 02. | Methacrylate diffuser                       | RF19022 |



RF31980

Smithfield Ceiling Driver 45W 450-1050mA



RF19022

Methacrylate diffuser