

## Smithfield Suspension Pro dimmable DALI

Designed by Jasper Morrison, 2009



45W - 2791lm - 2700K

Suspension lamp with direct light. Aluminium body. Available in gloss black, white, matt black, green, red or MUD. Injection-moulded opalescent methacrylate diffuser. Steel ceiling attachment with steel suspension cable, 5 pole electric cable in PTFE double insulation, working length 2700 mm. Control DALI dimmable.

Are you a professional and your project needs consulting and support?


BOOK AN APPOINTMENT

### Main specifications

|                        |                     |
|------------------------|---------------------|
| EAN                    | 8059607015131       |
| Mounting               | Suspension          |
| Environments           | Indoor dry location |
| Light source type      | LED                 |
| Light sources included | Yes                 |
| LED type               | LED Module          |
| Power (W)              | 45                  |
| Lumen Output (lm)      | 2791                |

### Physical

|                             |              |
|-----------------------------|--------------|
| Colour                      | Glossy Black |
| Length (mm)                 | 600          |
| Cord colour                 | Clear        |
| Cord length (mm)            | 2700         |
| Canopy colour               | Black        |
| Canopy length/diameter (mm) | 146          |
| Canopy height (mm)          | 36           |
| Net weight (kg)             | 5.8          |
| Package height (mm)         | 310          |
| Package width (mm)          | 710          |
| Package length (mm)         | 710          |
| Package volume (m3)         | 0.16         |
| IP internal                 | 20           |



### Download

Mounting instructions  PDF

### Photometric Files


LDT / IES  LDT

### Technical Drawings


2D  ZIP

3D  ZIP

 Bim  ZIP

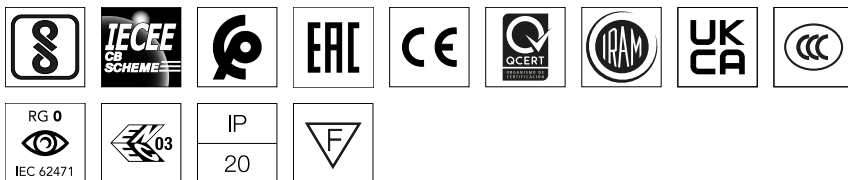

### Schematic light drawing



### Photometric

|                    |                |
|--------------------|----------------|
| Light distribution | Roto symmetric |
| CCT (K)            | 2700           |
| Extreme cut off    | No             |

### Electrical

|                    |                                       |
|--------------------|---------------------------------------|
| Insulation class   | I                                     |
| Frequency (Hz)     | 50/60                                 |
| Main voltage (Vac) | 200-240                               |
| Power supply       | Integrated                            |
| Dimmable           | Yes                                   |
| Power supply type  | Dimmable DALI 1                       |
| Dimming interface  | Remote Dimmable (Dimmer Not Included) |
| Batteries inside   | No                                    |


### Ecodesign and Energy Labelling

This product contains a light source of energy efficiency class F

Replaceable (LED only) light source by a professional

Replaceable control gear by a professional

Spare Parts

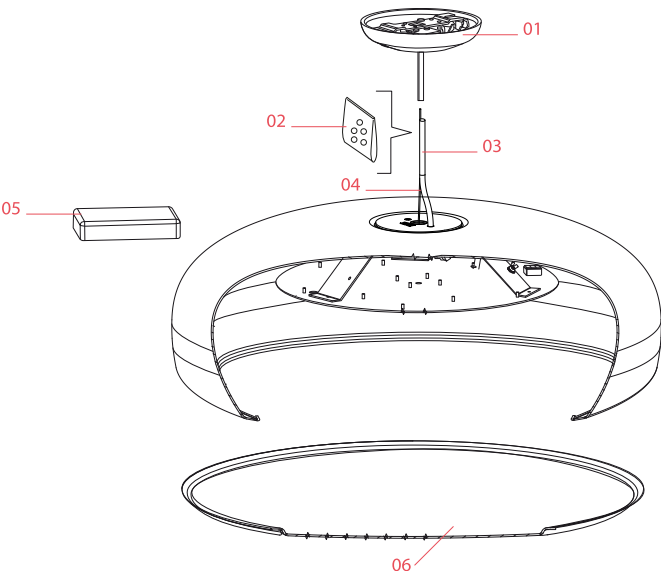

|     |                                  |           |
|-----|----------------------------------|-----------|
| 01. | Black rose assembly              | RA3690230 |
| 02. | Kit of 5 or rings                | RF05382   |
| 03. | Smithfield Suspension 2,7mt      | RF29934   |
|     | fep/pvc 5x0,75 transparent cable |           |
| 04. | 3 mt steel cable ø1,2 with 19    | RF29665   |
|     | winded wires                     |           |
| 05. | Driver 60W 500-1400mA 200-       | RF31674   |
|     | 240V                             |           |
| 06. | Methacrylate diffuser            | RF19022   |



RA3690230

Black rose assembly



RF05382

Kit of 5 or rings

RF29934

Smithfield Suspension 2,7mt  
fep/pvc 5x0,75 transparent cable



RF29665

3 mt steel cable  $\varnothing$ 1,2 with 19  
winded wires



RF31674

Driver 60W 500-1400mA 200-  
240V



RF19022

Methacrylate diffuser