

Smithfield Suspension Pro dimmable DALI

Designed by Jasper Morrison, 2009



45W - 2791lm - 2700K - CRI> 95

Suspension lamp with direct light. Aluminium body. Available in gloss black, white, matt black, green, red or MUD. Injection-moulded opalescent methacrylate diffuser. Steel ceiling attachment with steel suspension cable, 5 pole electric cable in PTFE double insulation, working length 2700 mm. Control DALI dimmable.

Are you a professional and your project needs consulting and support?


[BOOK AN APPOINTMENT](#)

Main specifications

EAN	8059607015155
Mounting	Suspension
Environments	Indoor dry location
Light source type	LED
Light sources included	Yes
LED type	LED Module
Power (W)	45
System power (W)	45
Lumen Output (lm)	2791

Physical

Colour	Red
Length (mm)	600
Cord colour	Clear
Cord length (mm)	2700
Canopy colour	Red
Canopy length/diameter (mm)	146
Canopy height (mm)	36
Net weight (kg)	5.8
Package height (mm)	310
Package width (mm)	710
Package length (mm)	710
Package volume (m3)	0.16
IP internal	20



Download

Mounting instructions  PDF

Photometric Files


LDT / IES  LDT

Technical Drawings


2D  ZIP

3D  ZIP

 Bim  ZIP

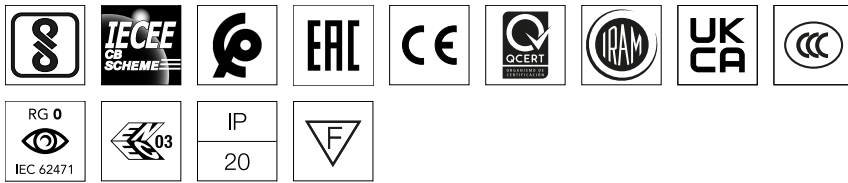

Schematic light drawing



Photometric


Light distribution	Roto symmetric
CCT (K)	2700
CRI>	95
Extreme cut off	No

Electrical


Insulation class	I
Frequency (Hz)	50/60
Main voltage (Vac)	200-240
Power supply	Integrated
Dimmable	Yes
Power supply type	Dimmable DALI 1
Dimming interface	Remote Dimmable (Dimmer Not Included)
Batteries inside	No

Ecodesign and Energy Labelling

This product contains a light source of energy efficiency class F

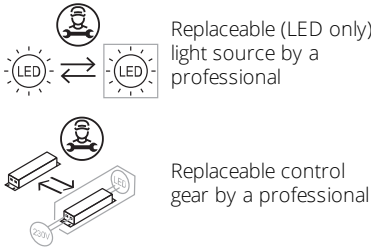

Spare Parts

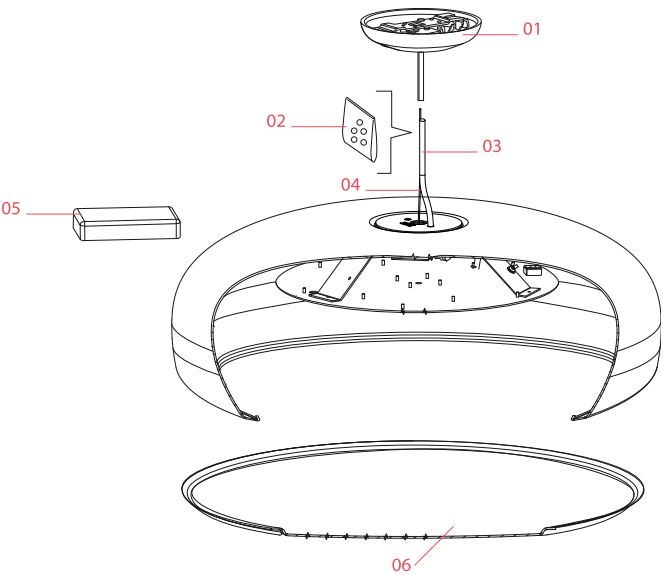

01.	Smithfield Suspension Red rose assembly	RF1367035
02.	Kit of 5 or rings	RF05382
03.	Smithfield Suspension 2,7mt fep/pvc 5x0,75 transparent cable	RF29934
04.	3 mt steel cable ø1,2 with 19 winded wires	RF29665
05.	Driver 60W 500-1400mA 200-240V	RF31674
06.	Methacrylate diffuser	RF19022



RF1367035

Smithfield Suspension Red rose assembly



RF05382

Kit of 5 or rings

RF29934

Smithfield Suspension 2,7mt
fep/pvc 5x0,75 transparent cable



RF29665

3 mt steel cable ø1,2 with 19
winded wires



RF31674

Driver 60W 500-1400mA 200-
240V



RF19022

Methacrylate diffuser