



Smithfield Suspension Pro dimmable DALI

Designed by Jasper Morrison, 2009



45W - 2791Im - 2700K - CRI> 95

Suspension lamp with direct light. Aluminium body. Available in gloss black, white, matt black, green, red or MUD. Injection-moulded opalescent methacrylate diffuser. Steel ceiling attachment with steel suspension cable, 5 pole electric cable in PTFE double insulation, working length 2700 mm. Control DALI dimmable.

Are you a professional and your project needs consulting and support?


BOOK AN APPOINTMENT

Main specifications

EAN	8059607015162		
Mounting	Suspension		
Environments	Indoor dry location		
Light source type	LED		
Light sources included	Yes		
LED type	LED Module		
Power (W)	45		
System power (W)	45		
Lumen Output (lm)	2791		

Physical

Colour	Green
Length (mm)	600
Cord colour	Clear
Cord length (mm)	2700
Canopy colour	Green
Canopy length/diameter (mm)	146
Canopy height (mm)	36
Net weight (kg)	5.8
Package height (mm)	310
Package width (mm)	710
Package length (mm)	710
Package volume (m3)	0.16
IP internal	20



Download Mounting instructions	⊥ PDF
Photometric Files	<u>↓</u> LDT
Technical Drawings	
2D	↓ ZIP
3D	⊥ ZIP
⊕Bim	⊥ ZIP

https://professional.flos.com/en/global/product/smithfield-suspension-pro-dimmable-dali-f1369039/


























Schematic light drawing



Photometric

Light distribution	Roto symmetric	
CCT (K)	2700	
CRI>	95	
Extreme cut off	No	

Electrical

Insulation class	1
Frequency (Hz)	50/60
Main voltage (Vac)	200-240
Power supply	Integrated
Dimmable	Yes
Power supply type	Dimmable DALI 1
Dimming interface	Remote Dimmable (Dimmer Not Included)
Batteries inside	No

Ecodesign and Energy Labelling

This product contains a light source of energy efficiency class F




Replaceable (LED only) light source by a professional



Replaceable control gear by a professional

Spare Parts

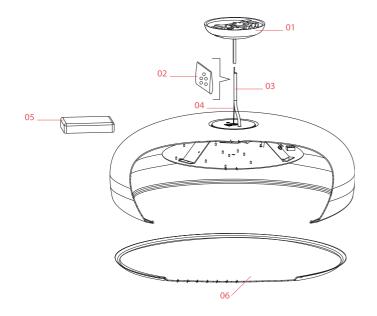

01.	Smithfield Suspension Green	RF1367039
	rose assembly	
02.	Kit of 5 or rings	RF05382
03.	Smithfiled Suspension 2,7mt	RF29934
	fep/pvc 5x0,75 transparent cable	
04.	3 mt steel cable ø1,2 with 19	RF29665
	winded wires	
05.	Driver 60W 500-1400mA 200-	RF31674
	240V	
06.	Methacrylate diffuser	RF19022

Smithfiled Suspension 2,7mt fep/pvc 5x0,75 transparent cable



00000



RF1367039

Smithfield Suspension Green rose assembly

RF05382

Kit of 5 or rings

RF29665

3 mt steel cable ø1,2 with 19 winded wires





RF31674

Driver 60W 500-1400mA 200-240V

RF19022

Methacrylate diffuser