

# FLOS


 FU136739 Green

## Smithfield Suspension Pro

Designed by Jasper Morrison, 2009



Smithfield Suspension LED version is now available in two color temperatures 2700K and 3000K. Available in 3500K, please inquiry for more details. Part of the Smithfield family, the Smithfield Suspension manages to be both grand and unassuming in Halogen and new LED versions. Providing direct light through its aluminum body, it is well suited for a variety of environments. Available in black, matte black, mud and white. Its diffuser is injection-molded opalescent PC (polycarbonate). The steel ceiling attachment features a steel suspension cable, and the three-pole electric cable is PTFE double insulation. Inspiration behind the design: Jasper Morrison is known for his ability to take the beauty that he sees in the world around him and translate it into his work. To that end, the Smithfield family was named for the Smithfield Market in London, where the artist was inspired by the industrial nature of the fixtures he saw. "I've always liked the industrial and functional character of these lights," he says. "I wanted to make a project out of them, looking for some way of making use of their efficiency in delivering light, and the forms themselves which are so much a part of the good atmosphere of industrial spaces."



Are you a professional and your project needs consulting and support?

[BOOK AN APPOINTMENT](#)

### Download

Family spec sheet



Mounting instructions




### Ecodesign and Energy Labelling

This product contains a light source of energy efficiency class F



Replaceable (LED only) light source by a professional



Replaceable control gear by a professional

## Main specifications

EAN	8059607010686
Mounting	Suspension
Environments	Indoor dry location
Light Source Type	LED
Light sources included	Yes
LED type	LED Module
Power (W)	45
System power (W)	45
System flux (lm)	2623

## Physical

Color	Green
Length (in)	23.62
Cord color	Clear
Cord length (in)	106.299
Canopy color	Green
Canopy length/diameter (in)	5.748
Canopy height (in)	1.417
Net weight (lb)	12.79
Package height (in)	27.95
Package width (in)	12.2
Package length (in)	27.95
Package volume (in)	9536.22
IP internal	20



IP
20

## Photometric

Light distribution	Roto symmetric
CCT (K)	2700
CRI>	95
Extreme cut off	No

## Electrical


Insulation class	I
Frequency (Hz)	50/60
Main voltage (Vac)	120
Driver	Integrated
Dimmable	Yes
Dimming type	Dimmable 0-10V
Dimming interface	Remote Dimmable (Dimmer Not Included)
Batteries inside	No

## Notes

Dimmable 0-10V (10% up to 100% for 120V and 25% up to 100% for 277V).  
3500K customised product. Please consult the Sales Department for delivery times.  
Steel cable 13.12ft.  
Class 2



Spare Parts

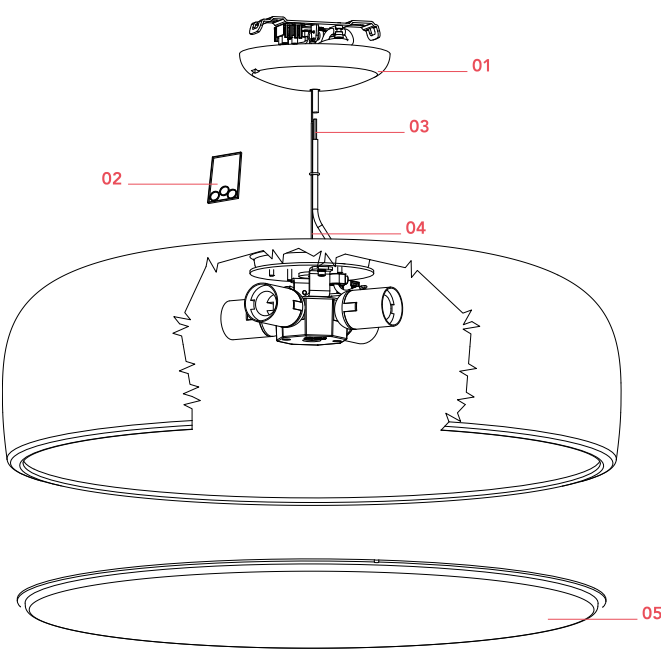

- |     |                                            |           |
|-----|--------------------------------------------|-----------|
| 01. | Smithfield Suspension Rose Assembly        | RFU137139 |
| 02. | Kit of 5 or rings                          | RF05382   |
| 03. | Power Cord for Smithfield                  | RF19342   |
| 04. | 4mt steel wire Ø1,2 with 19 winded wires   | RF01089   |
| 04. | 3 mt steel cable ø1,2 with 19 winded wires | RF29665   |
| 05. | Driver 50W 1200mA 120/277V                 | RF31656   |
| 06. | Methacrylate diffuser                      | RF19022   |



RFU137139

Smithfield Suspension Rose Assembly



RF05382

Kit of 5 or rings



RF19342

Power Cord for Smithfield



RF01089

4mt steel wire Ø1,2 with 19 winded wires



RF29665

3 mt steel cable Ø1,2 with 19 winded wires



RF31656

Driver 50W 1200mA 120/277V



RF19022

Methacrylate diffuser