

FLOS

 F026A3BB018 Deep Brown

Spine 2 Absolute Dimmable 1-10V

Designed by Vincent Van Duysen, 2021




2085lm - 3000K - CRI> 80 - Beam° 22

LED COB light source included. Integrated electric power supply 220-240 V ON/OFF and adjustable 1-10 V or DALI. Fixing plate included. The electrical connection is made on the inside of the plate by means of a watertight connector included. To guarantee its water tightness, it is recommended to use flexible cables designed for outdoor use. Ground spike for ground installations to be ordered separately.

Are you a professional and your project needs consulting and support?

[BOOK AN APPOINTMENT](#)

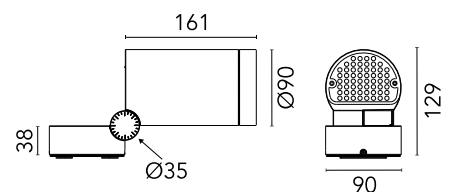

Main specifications

EAN	8054793466248
Mounting	Ceiling, Wall, Ground
Environments	Outdoor wet location
Light source type	LED
Light sources included	Yes
LED type	LED array
Number of lamps	1
System power (W)	19.5
Source flux (lm)	2367
Lumen Output (lm)	2085

Physical

Colour	Deep Brown
Orientation	Adjustable
Rotation (°)	360
Longitudinal tilting (°)	270
Net weight (kg)	1.2
Package height (mm)	120
Package width (mm)	310
Package length (mm)	120
IP internal	66

Download

[Mounting instructions](#)  ZIP

Photometric Files

[LDT / IES](#)  ZIP


Technical Drawings

[2D](#)  ZIP

[3D](#)  ZIP



Schematic light drawing



Photometric

Light distribution	Symmetric
CCT (K)	3000
CRI>	80
Beam angle C0-180 (°)	22
Beam angle C90-270 (°)	22

Electrical

Insulation class	I
Frequency (Hz)	50/60
Main voltage (Vac)	220-240
Power supply	Integrated
Dimmable	Yes
Power supply type	Dimmable 1-10V
Dimming interface	Dimmer Integrated
Emergency	No

Ecodesign and Energy Labelling

This product contains a light source of energy efficiency class D

Replaceable (LED only) light source by a professional

Replaceable control gear by a professional

Accessories & Power Supply



OPTIONAL
Accessory

F026Z010000

Ground Spike



OPTIONAL
Accessory

F026Z060000

Honeycomb Louvre