

FLOS

F026Q2BB001 White

Spine L 2 Absolute Dimmable 1-10V


Designed by Vincent Van Duysen, 2021



LED COB light source integrated. Integrated electric power supply 220-240 V ON/OFF and adjustable 1-10 V or DALI. Minimum L-shaped mounting support integrated. Equipped with a 5 m neoprene cable (10 m upon request) for remote connection. To guarantee its water tightness, it is recommended to use flexible cables designed for outdoor use.

Are you a professional and your project needs consulting and support?

BOOK AN APPOINTMENT

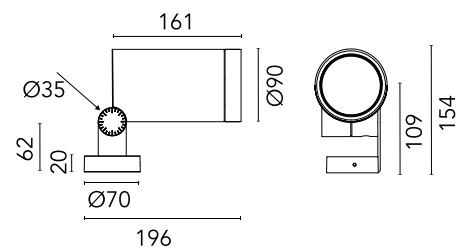

Main specifications

| | |
|------------------------|-----------------------|
| EAN | 8054793509655 |
| Mounting | Ceiling, Wall, Ground |
| Environments | Outdoor wet location |
| Light source type | LED |
| Light sources included | Yes |
| LED type | LED array |
| Number of lamps | 1 |
| System power (W) | 19.5 |
| Source flux (lm) | 2197 |
| Lumen Output (lm) | 1939 |

Physical

| | |
|--------------------------|------------|
| Colour | White |
| Orientation | Adjustable |
| Longitudinal tilting (°) | 155 |
| Net weight (kg) | 2.5 |
| Package height (mm) | 205 |
| Package width (mm) | 290 |
| Package length (mm) | 265 |
| Package volume (m3) | 0.02 |
| IP internal | 66 |

Download

Mounting instructions [ZIP](#)

Photometric Files

LDT / IES [ZIP](#)


Technical Drawings

2D [ZIP](#)

3D [ZIP](#)



Schematic light drawing

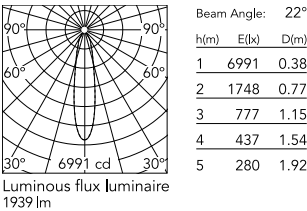

Photometric


| | |
|------------------------|-----------|
| Light distribution | Symmetric |
| CCT (K) | 2700 |
| CRI> | 80 |
| Beam angle C0-180 (°) | 22 |
| Beam angle C90-270 (°) | 22 |

Electrical


| | |
|--------------------|-------------------|
| Insulation class | I |
| Frequency (Hz) | 50/60 |
| Main voltage (Vac) | 220-240 |
| Power supply | Integrated |
| Dimmable | Yes |
| Power supply type | Dimmable 1-10V |
| Dimming interface | Dimmer Integrated |
| Emergency | No |

Ecodesign and Energy Labelling

This product contains a light source of energy efficiency class D



Replaceable (LED only) light source by a professional



Replaceable control gear by a professional

Notes

5 m neoprene cable (10 m upon request) for remote connection.

Accessories & Power Supply



OPTIONAL
Accessory

F990C030000

4 way junction box 5 poles IP68
(6-14 mm cables)



OPTIONAL
Accessory

F990C080000


Connector kit 5-pole flying socket
+ EU plug IP68.



OPTIONAL
Accessory

F026Z060000

Honeycomb Louvre



OPTIONAL
Accessory

F990C110000

Gelbox IPX8 for splicing
connectors