

# FLOS

F026Q2CB001 White

## Spine L 2 Absolute Dimmable 1-10V


Designed by Vincent Van Duysen, 2021



LED COB light source integrated. Integrated electric power supply 220-240 V ON/OFF and adjustable 1-10 V or DALI. Minimum L-shaped mounting support integrated. Equipped with a 5 m neoprene cable (10 m upon request) for remote connection. To guarantee its water tightness, it is recommended to use flexible cables designed for outdoor use.

Are you a professional and your project needs consulting and support?

BOOK AN APPOINTMENT

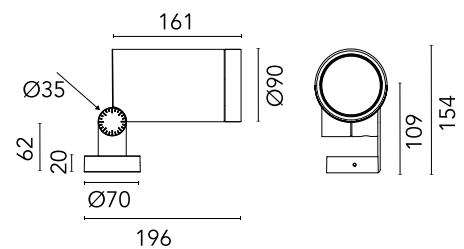

### Main specifications

|                        |                       |
|------------------------|-----------------------|
| EAN                    | 8054793510019         |
| Mounting               | Ceiling, Wall, Ground |
| Environments           | Outdoor wet location  |
| Light source type      | LED                   |
| Light sources included | Yes                   |
| LED type               | LED array             |
| Number of lamps        | 1                     |
| System power (W)       | 19.5                  |
| Source flux (lm)       | 2197                  |
| Lumen Output (lm)      | 2026                  |

### Physical

|                          |            |
|--------------------------|------------|
| Colour                   | White      |
| Orientation              | Adjustable |
| Longitudinal tilting (°) | 155        |
| Net weight (kg)          | 2.5        |
| Package height (mm)      | 205        |
| Package width (mm)       | 290        |
| Package length (mm)      | 265        |
| Package volume (m3)      | 0.02       |
| IP internal              | 66         |

### Download

Mounting instructions [ZIP](#)

### Photometric Files

LDT / IES [ZIP](#)


### Technical Drawings

2D [ZIP](#)

3D [ZIP](#)



Schematic light drawing



Photometric


|                        |           |
|------------------------|-----------|
| Light distribution     | Symmetric |
| CCT (K)                | 2700      |
| CRI>                   | 80        |
| Beam angle C0-180 (°)  | 43        |
| Beam angle C90-270 (°) | 43        |

Electrical


|                    |                   |
|--------------------|-------------------|
| Insulation class   | I                 |
| Frequency (Hz)     | 50/60             |
| Main voltage (Vac) | 220-240           |
| Power supply       | Integrated        |
| Dimmable           | Yes               |
| Power supply type  | Dimmable 1-10V    |
| Dimming interface  | Dimmer Integrated |
| Emergency          | No                |

Ecodesign and Energy Labelling

This product contains a light source of energy efficiency class D



Replaceable (LED only) light source by a professional



Replaceable control gear by a professional

Notes

5 m neoprene cable (10 m upon request) for remote connection.

Accessories & Power Supply



OPTIONAL  
Accessory

F990C030000

4 way junction box 5 poles IP68  
(6-14 mm cables)



OPTIONAL  
Accessory

F990C080000


Connector kit 5-pole flying socket  
+ EU plug IP68.



OPTIONAL  
Accessory

F026Z060000

Honeycomb Louvre



OPTIONAL  
Accessory

F990C110000

Gelbox IPX8 for splicing  
connectors