


# FLOS

SP15W700MA-VAR-C01 Raw

## Splice Box UL 700mA, 15W, Tri-Mode Dimming TRIAC, ELV & 0-10 V, 120-277V

Designed by FLOS Architectural

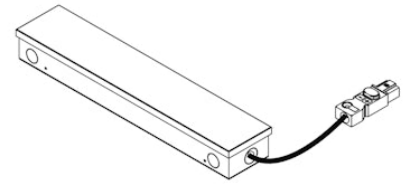

Are you a professional and your project needs consulting and support?


[BOOK AN APPOINTMENT](#)

### Main specifications

Environments	Indoor dry location
Power (W)	15

### Physical

Color	Raw
Length (in)	7
IP internal	20

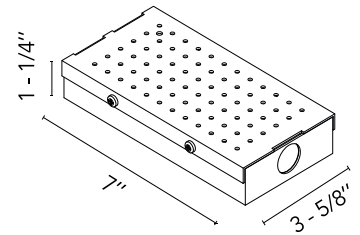

## Photometric

Extreme cut off No

## Electrical

Frequency (Hz)	50/60
Main voltage (Vac)	120-277
LED current (mA)	700
Driver	Remote
Dimmable	Yes
Dimming type	Dimmable 0-10V, Mains Cut Dimming
Dimming range (%)	1-100
Dimming interface	Remote Dimmable (Dimmer Not Included)
Precabled	No

## Notes

Class 2, Size: 7" x 3 5/8" x 1 1/4"

---