


FLOS

SP25W700MA-10V-A01 Raw

Splice Box UL 700mA , 25W, 0-10V Dimmable, 120-277V

Designed by FLOS Architectural



Are you a professional and your project needs consulting and support?


[BOOK AN APPOINTMENT](#)

Main specifications

Environments	Indoor dry location
Power (W)	25

Physical

Color	Raw
Length (in)	7
IP internal	20

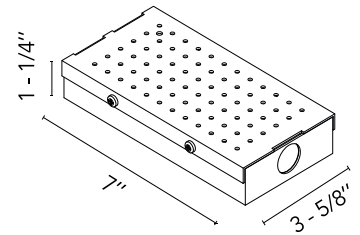

Photometric

Extreme cut off	No
-----------------	----

Electrical

Frequency (Hz)	50/60
Main voltage (Vac)	120-277
LED current (mA)	700
Driver	Remote
Dimmable	Yes
Dimming type	Dimmable 0-10V
Dimming interface	Remote Dimmable (Dimmer Not Included)
Precabled	No

Notes

Class 2, Size: 7" x 3 5/8" x 1 1/4"
