


FLOS


SP30W350MA-277-U01

Splice Box UL 7"x2.22"x1.25", With Driver Programmed to 350mA , 30W, 0-10V Dimmable, Thermal 277V

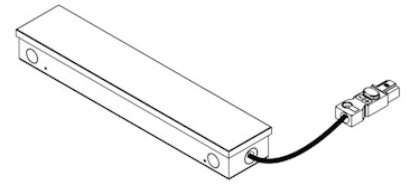

Are you a professional and your project needs consulting and support?

[BOOK AN APPOINTMENT](#)

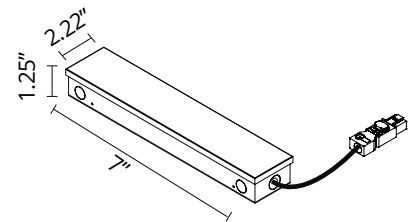

Main specifications

Environments	Indoor dry location
Power (W)	30

Physical

IP internal	20
-------------	----



Electrical

Frequency (Hz)	50/60
Main voltage (Vac)	277
LED current (mA)	350
Driver	Integrated
Dimmable	Yes
Dimming type	Dimmable 0-10V