


Splice Box UL 7"x2.22"x1.25", With Driver
Programmed to 350mA , 30W, ELV Phase
Dimmable, Thermal 120V

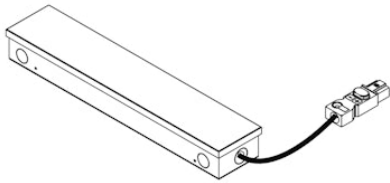

Are you a professional and your project needs
consulting and support?


BOOK AN APPOINTMENT

Main specifications

Environments	Indoor dry location
Power (W)	30

Physical

IP internal	20
-------------	----

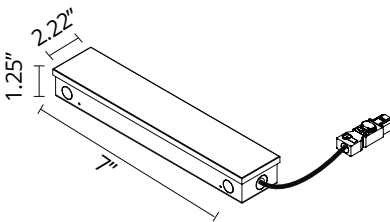

Electrical

Frequency (Hz)	50/60
Main voltage (Vac)	120
LED current (mA)	350
Driver	Integrated
Dimmable	Yes
Dimming type	Dimmable ELV