


SP25W400MA-120-A01

Splice Box UL 7"x2.22"x1.25", With Driver  
Programmed to 400mA , 25W, 0-10V Dimmable,  
Thermal 120V

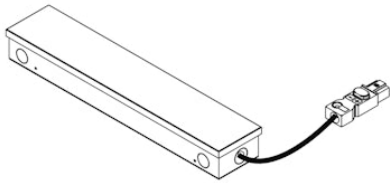

Are you a professional and your project needs consulting and support?


BOOK AN APPOINTMENT

Main specifications

|              |                     |
|--------------|---------------------|
| Environments | Indoor dry location |
| Power (W)    | 25                  |

Physical

|             |    |
|-------------|----|
| IP internal | 20 |
|-------------|----|

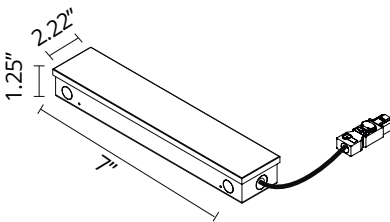

Electrical

|                    |                |
|--------------------|----------------|
| Frequency (Hz)     | 50/60          |
| Main voltage (Vac) | 120            |
| LED current (mA)   | 400            |
| Driver             | Integrated     |
| Dimmable           | Yes            |
| Dimming type       | Dimmable 0-10V |