


FLOS

LEDSB26W500MA-LTE-S01

Splice Box UL 7"x3-5/8"x1-1/4", Dim Hi-lume 1% 2-Wire LED Driver, 500mA, 26W, 120V




Are you a professional and your project needs consulting and support?

BOOK AN APPOINTMENT

Main specifications

Environments	Indoor dry location
Power (W)	26

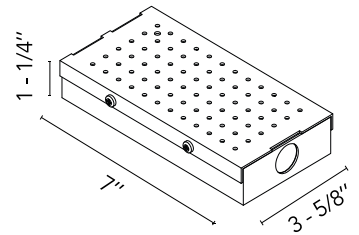

Electrical

Frequency (Hz)	50/60
Main voltage (Vac)	120
LED current (mA)	500
Driver	Remote
Dimmable	Yes