


FLOS

SP26W500MA-TRI-S01

Splice Box UL 7"x3-5/8"x1-1/4", Dim Hi-lume 1% 2-Wire LED Driver 500mA , 26W, 120V




Are you a professional and your project needs consulting and support?

BOOK AN APPOINTMENT

Main specifications

| | |
|--------------|---------------------|
| Environments | Indoor dry location |
| Power (W) | 26 |

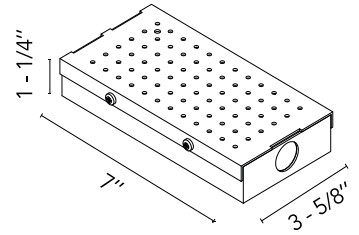

Electrical

| | |
|--------------------|--------|
| Frequency (Hz) | 50/60 |
| Main voltage (Vac) | 120 |
| LED current (mA) | 500 |
| Driver | Remote |
| Dimmable | Yes |