


FLOS


SP40W600MA-277-A01

Splice Box UL 9" L x 2.5" W x 1.5" H, With Driver Programmed to 600mA , 40W, 0-10V Dimmable, Thermal 277V

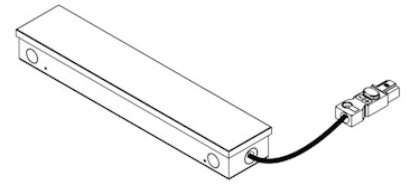

Are you a professional and your project needs consulting and support?

[BOOK AN APPOINTMENT](#)

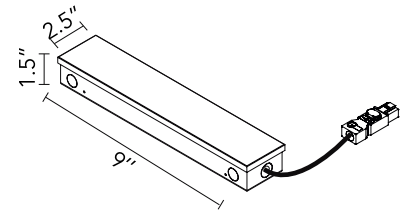

Main specifications

| | |
|--------------|---------------------|
| Environments | Indoor dry location |
| Power (W) | 40 |

Physical

| | |
|-------------|----|
| Length (in) | 9 |
| IP internal | 20 |



Electrical

| | |
|--------------------|----------------|
| Frequency (Hz) | 50/60 |
| Main voltage (Vac) | 277 |
| LED current (mA) | 600 |
| Driver | Integrated |
| Dimmable | Yes |
| Dimming type | Dimmable 0-10V |
| Dimming range (%) | 1-100 |