

# FLOS



FA54100312 Forest Green


## Spock 1

NEW

Designed by FLOS Outdoor, 2013



LED source included. Integrated electrical power supply 220-240V ON/OFF. Fixing bracket included. Equipped with a 1000 mm protruding section of neoprene cable and a kit with crimpable connectors and adhesive heat-shrinkable sleeves that guarantee the tightness of the connection. Optional IP68 connectors available. The metal nail for ground installation needs to be ordered separately. Optional accessories to regulate the light beam. Dimmable version available upon request.

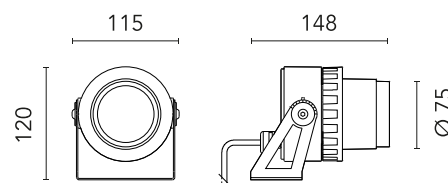

Are you a professional and your project needs consulting and support?

BOOK AN APPOINTMENT

### Main specifications

|                        |                      |
|------------------------|----------------------|
| EAN                    | 8054793686660        |
| Mounting               | Ground               |
| Environments           | Outdoor wet location |
| Light source type      | LED                  |
| Light sources included | Yes                  |
| LED type               | LED array            |
| Number of lamps        | 1                    |
| Power (W)              | 9                    |
| System power (W)       | 11                   |
| Source flux (lm)       | 1134                 |
| Lumen Output (lm)      | 780                  |

### Physical

|                          |              |
|--------------------------|--------------|
| Colour                   | Forest Green |
| Orientation              | Adjustable   |
| Longitudinal tilting (°) | 270          |
| Net weight (kg)          | 0.89         |
| Package height (mm)      | 150          |
| Package width (mm)       | 135          |
| Package length (mm)      | 180          |
| IP internal              | 66           |

### Download

Mounting instructions [ZIP](#)

### Photometric Files

LDT / IES [ZIP](#)


### Technical Drawings

2D [ZIP](#)

3D [ZIP](#)



Schematic light drawing



Photometric

|                        |           |
|------------------------|-----------|
| Light distribution     | Symmetric |
| CCT (K)                | 3000      |
| CRI>                   | 80        |
| Beam angle C0-180 (°)  | 20        |
| Beam angle C90-270 (°) | 20        |
| Extreme cut off        | No        |

Electrical

|                    |              |
|--------------------|--------------|
| Insulation class   | I            |
| Frequency (Hz)     | 50/60        |
| Main voltage (Vac) | 220-240      |
| Power supply       | Integrated   |
| Dimmable           | No           |
| Power supply type  | Non Dimmable |
| Dimming interface  | Not Dimmable |
| Emergency          | No           |


Notes

Please check with your referent person in our Front Office if a code modification is needed to meet the required certification compliance


Dimmable version on request

Ecodesign and Energy Labelling

This product contains a light source of energy efficiency class E



Replaceable (LED only) light source by a professional



Replaceable control gear by a professional

Accessories & Power Supply



OPTIONAL  
Accessory

FA20830

Flood Diffuser Spock 1



OPTIONAL  
Accessory

FA20630


Visor Spock 2



OPTIONAL  
Accessory

FA203

Kit Ground Spikes Spock 1/Spock 2/Spock 3



OPTIONAL  
Accessory

FA21130


Anti-Glare Louvre Spock 1



OPTIONAL  
Accessory

FA26130

Elliptical Lens Spock 1



OPTIONAL  
Accessory

F990E00A000

S.P.D. (SURGE PROTECTION DEVICE)



OPTIONAL  
Accessory

F990C010000

3/4 way terminal block 4 poles IP68 H2O stop. (ø5,5÷12mm cable)



OPTIONAL  
Accessory

F990C00A000

2 way terminal block 4 poles IP68 H2O stop. (ø5,5÷12mm cable)