

# FLOS

03.9570.14 Black

## Super Line Pro Down NEW


Designed by FLOS Architectural



LED luminaire for general lighting with a signature minimalist and compact design, to be installed on ceilings by means of suspension. Power source included in installation kits must be ordered separately, allowing the maximum brightness to be selected.

Are you a professional and your project needs consulting and support?

[BOOK AN APPOINTMENT](#)

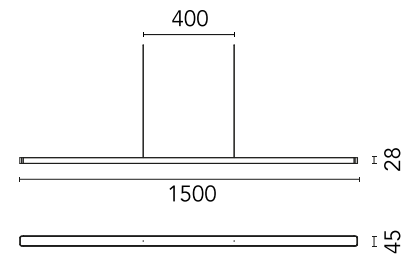

### Main specifications

|                   |                     |
|-------------------|---------------------|
| Mounting          | Suspension          |
| Environments      | Indoor dry location |
| Light Source Type | LED                 |
| LED type          | Top LED             |
| Lamp category     | LED                 |
| Number of heads   | 1                   |
| Power (W)         | 38.7                |
| System power (W)  | 39                  |
| System flux (lm)  | 3801                |
| Efficacy (lm/W)   | 97.46               |

### Physical

|                 |       |
|-----------------|-------|
| Colour          | Black |
| Trim            | No    |
| Orientation     | Fixed |
| Length (mm)     | 1500  |
| Net weight (kg) | 1.45  |
| IP internal     | 20    |
| IP external     | 20    |

### Download

Mounting instructions [↓ PDF](#)

### Photometric Files


LDT / IES [↓ ZIP](#)

### Technical Drawings


2D [↓ ZIP](#)

3D [↓ ZIP](#)

[↓ ZIP](#) Bim



## Schematic light drawing



## Photometric

|                          |           |
|--------------------------|-----------|
| Lighting type            | Direct    |
| Light distribution       | Symmetric |
| CCT (K)                  | 3000      |
| CRI>                     | 90        |
| McAdam steps (SDCM)      | 3         |
| LED Life / Failure Ratio | L80B50    |
| Beam angle C0-180 (°)    | 80        |
| Beam angle C90-270 (°)   | 80        |
| UGR <sub>L</sub>         | <19       |

## Electrical

|                     |                                       |
|---------------------|---------------------------------------|
| Insulation class    | III                                   |
| Forward voltage (V) | 35.9                                  |
| LED current (mA)    | 1050                                  |
| Power Supply        | Remote                                |
| Dimmable            | Yes                                   |
| Power Supply Type   | Non Dimmable, Dimmable DALI 1         |
| Dimming interface   | Remote Dimmable (Dimmer Not Included) |
| Emergency type      | No                                    |

## Ecodesign and Energy Labelling



Replaceable (LED only) light source by a professional




Replaceable control gear by a professional

## Notes

UGR<19 & cd/m<sup>2</sup> @ 65°<3000 workplace optimised. Cable 4.25 m

## Accessories & Power Supply




REQUIRED  
Power supply

Electrical

08.0520.02A

Surface Kit 60W. Non Dimmable




REQUIRED  
Power supply

Electrical

08.0520.14A

Surface Kit 60W. Non Dimmable




REQUIRED  
Power supply

Electrical

08.0520.40A

Surface Kit 60W. Non Dimmable




REQUIRED  
Power supply

Electrical

08.0520.ETA

Surface Kit 60W. Non Dimmable




REQUIRED  
Power supply

Electrical

08.0520.EUA

Surface Kit 60W. Non Dimmable




REQUIRED  
Power supply

Electrical

08.0522.02A

Recessed Kit 60W. Non Dimmable




REQUIRED  
Power supply

Electrical

08.0522.14A

Recessed Kit 60W. Non Dimmable



REQUIRED  
Power supply

Electrical

08.0522.40A

Recessed Kit 60W. Non Dimmable



REQUIRED  
Power supply  
Electrical

08.0522.ETA


Recessed Kit 60W. Non Dimmable



REQUIRED  
Power supply  
Electrical

08.0522.EUA


Recessed Kit 60W. Non Dimmable



REQUIRED  
Power supply  
Electrical

08.0521.EUA


Surface Kit 60W. Dali Version



REQUIRED  
Power supply  
Electrical

08.0521.ETA


Surface Kit 60W. Dali Version



REQUIRED  
Power supply  
Electrical

08.0521.40A


Surface Kit 60W. Dali Version



REQUIRED  
Power supply  
Electrical

08.0521.14A

Surface Kit 60W. Dali Version



REQUIRED  
Power supply  
Electrical

08.0521.02A

Surface Kit 60W. Dali Version



REQUIRED  
Power supply  
Electrical

08.0523.EUA


Recessed Kit 60W. Dali Version



REQUIRED  
Power supply  
Electrical

08.0523.ETA


Recessed Kit 60W. Dali Version



REQUIRED  
Power supply  
Electrical

08.0523.40A


Recessed Kit 60W. Dali Version



REQUIRED  
Power supply  
Electrical

08.0523.14A

Recessed Kit 60W. Dali Version



REQUIRED  
Power supply  
Electrical

08.0523.02A

Recessed Kit 60W. Dali Version



REQUIRED  
Power supply  
Electrical

08.0525.02A

Remote Power Supply Kit 60W.  
Dali Version



REQUIRED  
Power supply  
Electrical

08.0525.14A

Remote Power Supply Kit 60W.  
Dali Version



REQUIRED  
Power supply  
Electrical

08.0525.40A

Remote Power Supply Kit 60W.  
Dali Version



REQUIRED  
Power supply  
Electrical

08.0525.ETA

Remote Power Supply Kit 60W.  
Dali Version



REQUIRED  
Power supply

Electrical

08.0525.EUA

Remote Power Supply Kit 60W.  
Dali Version



REQUIRED  
Power supply

Electrical

08.0524.02

Remote Power Supply Kit 60W.  
Non Dimmable



REQUIRED  
Power supply

Electrical

08.0524.14

Remote Power Supply Kit 60W.  
Non Dimmable



REQUIRED  
Power supply

Electrical

08.0524.40

Remote Power Supply Kit 60W.  
Non Dimmable



REQUIRED  
Power supply

Electrical

08.0524.ET

Remote Power Supply Kit 60W.  
Non Dimmable



REQUIRED  
Power supply

Electrical

08.0524.EU

Remote Power Supply Kit 60W.  
Non Dimmable